



FRONT ELEVATION
1/4" = 1'




RIGHT ELEVATION
1/4" = 1'

Riley Palmer
Construction Company, Inc.
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161


TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS
11/2/95	[Signature]





REAR ELEVATION
1/4" = 1'

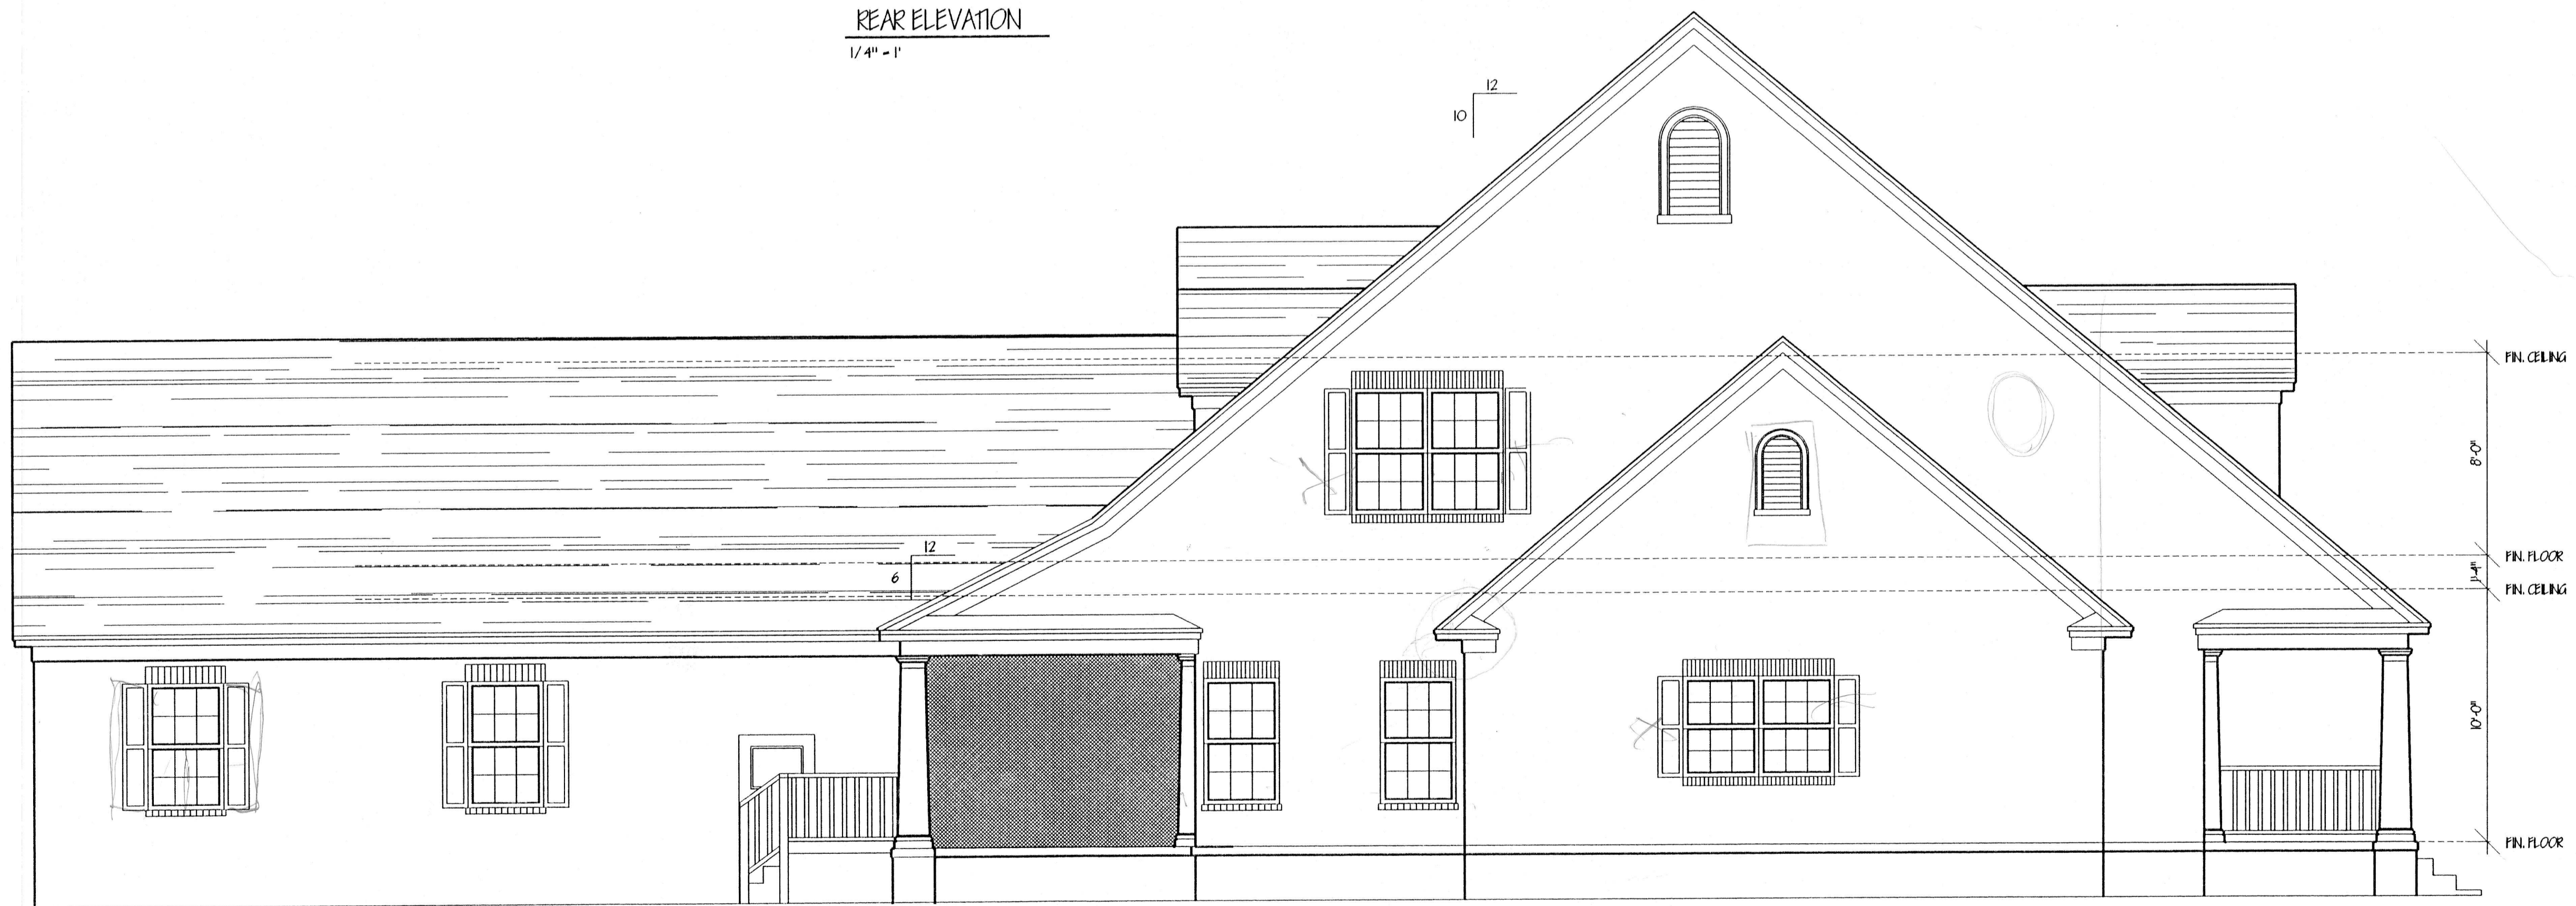

LEFT ELEVATION
1/4" = 1'

Riley Palmer
Construction Company, Inc.
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161

TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

ISSUE DATE

DRAWN BY:

PROJECT NO:


REVISIONS:

DATE REMARKS

DATE	REMARKS


A-2

*Kitchen
Front
Door*

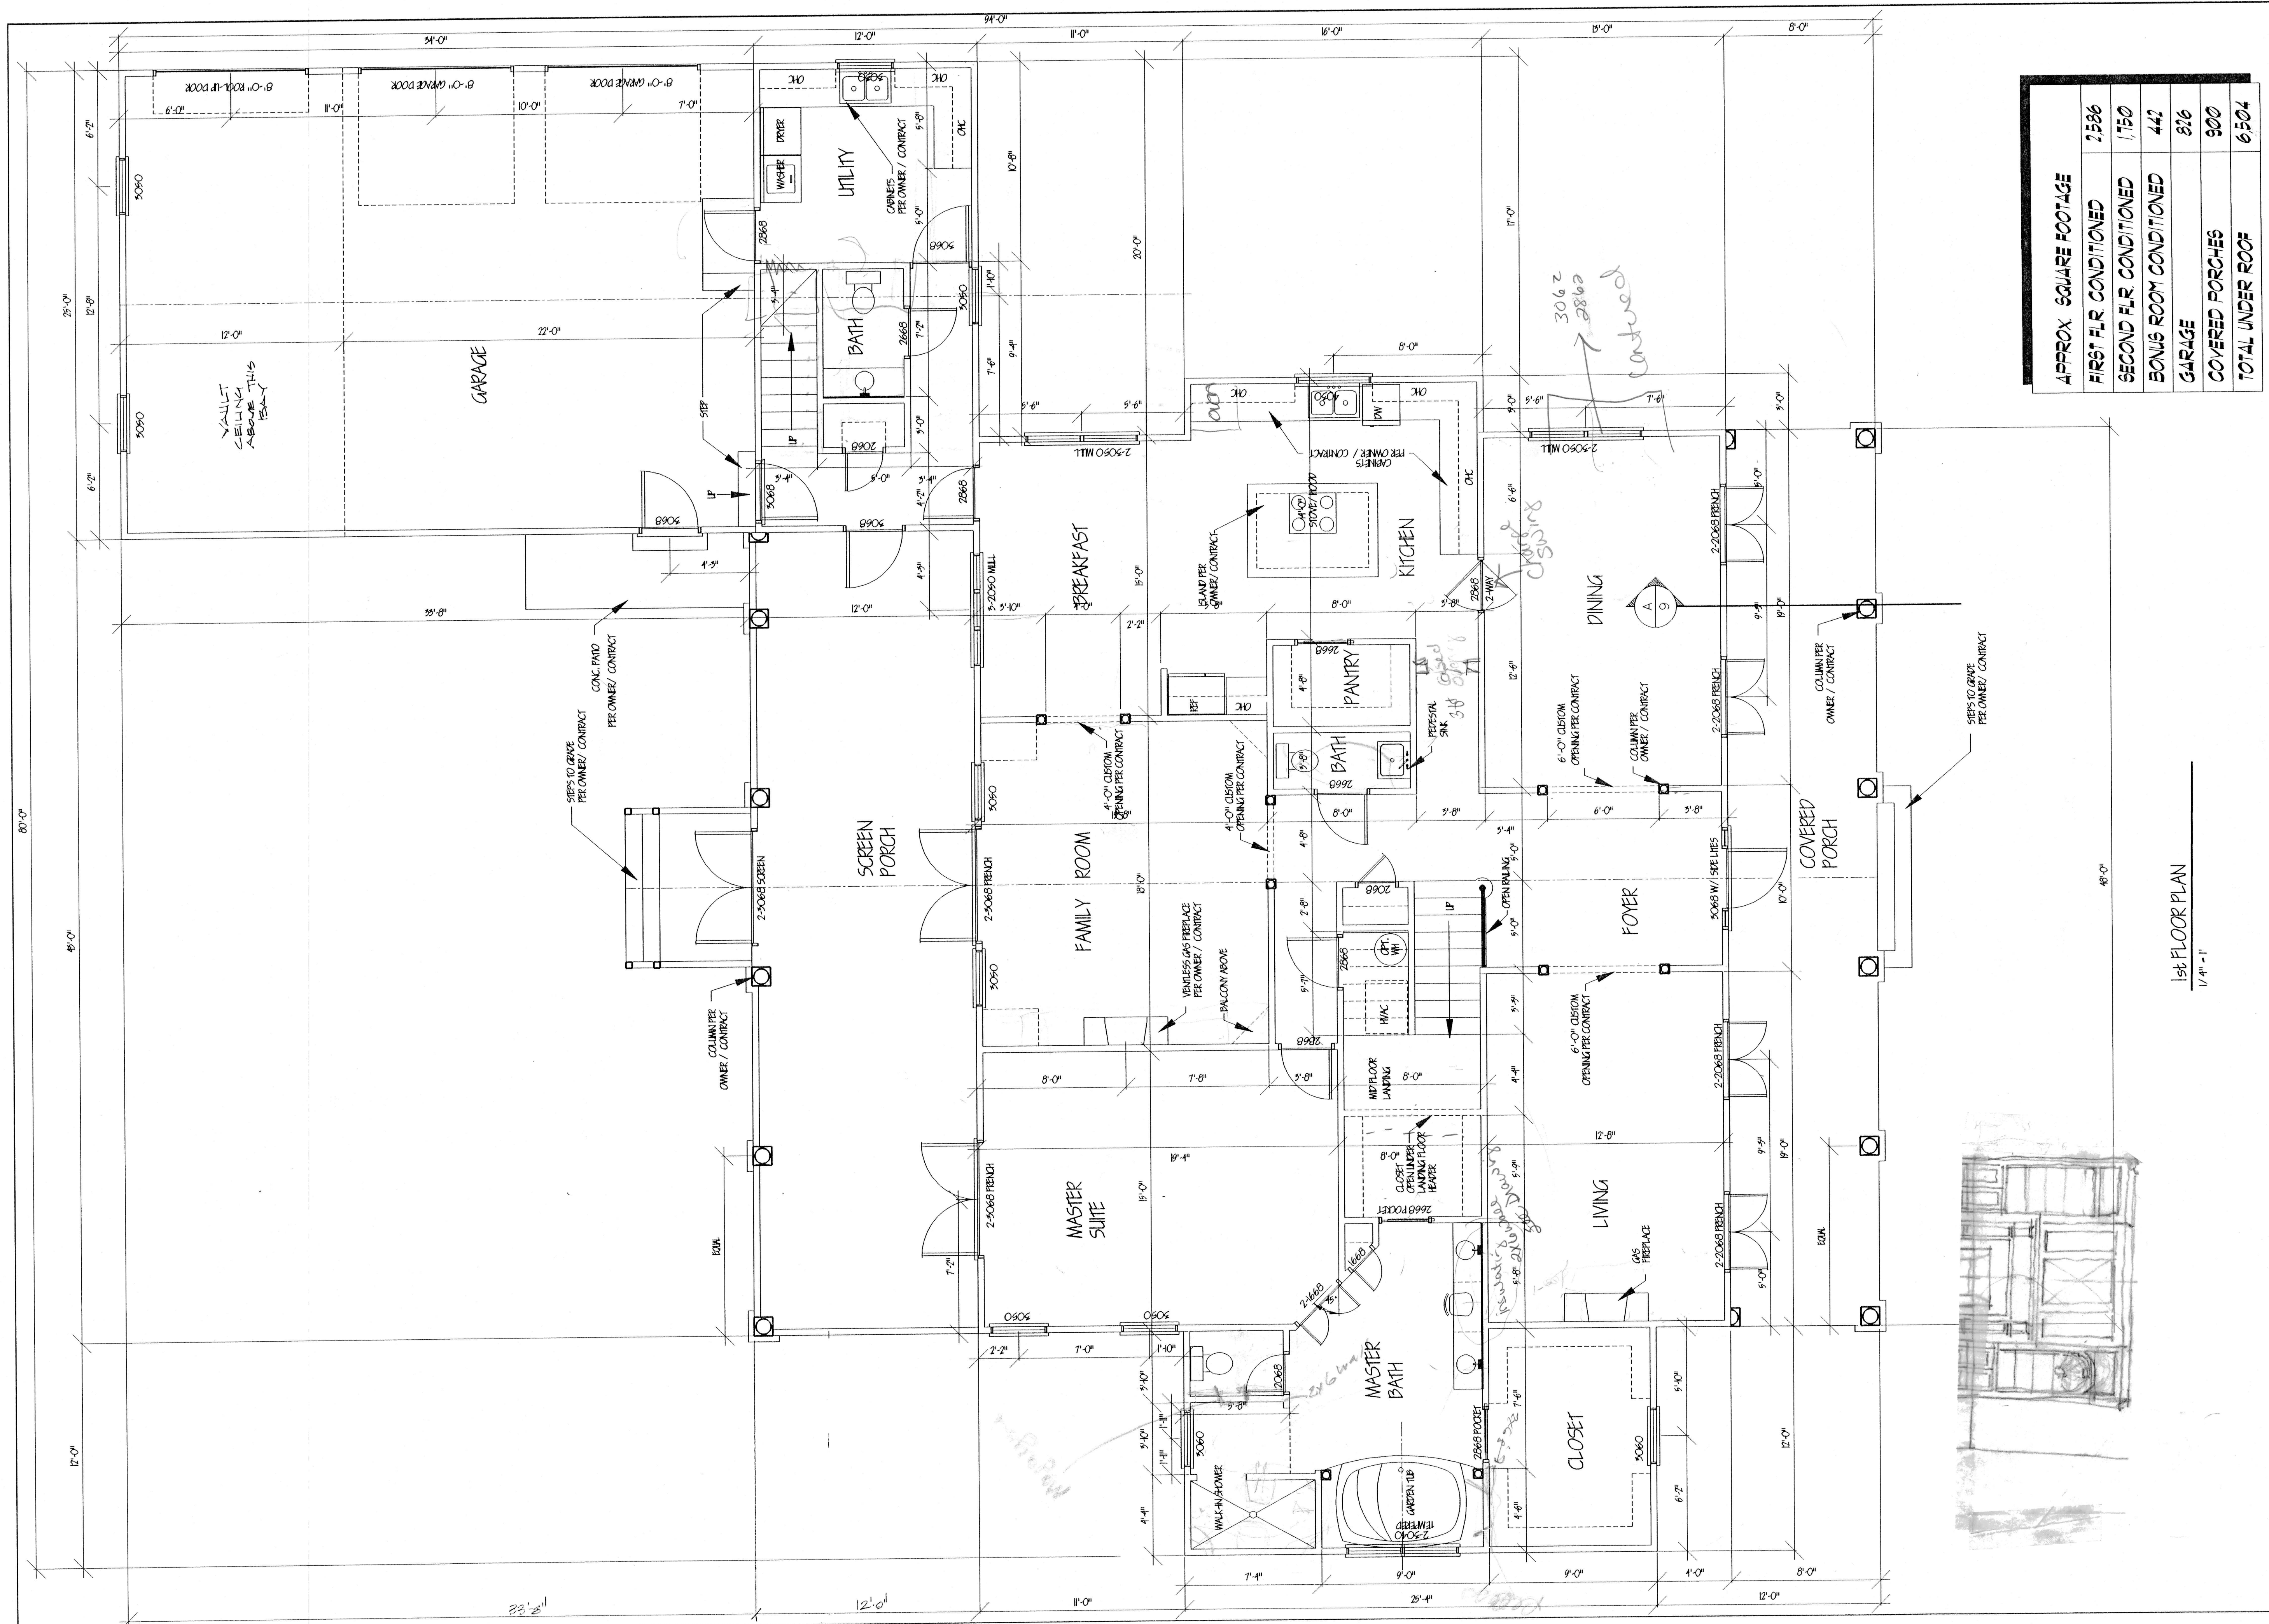

APPROX. SQUARE FOOTAGE	
FIRST FLR. CONDITIONED	2,586
SECOND FLR. CONDITIONED	1,750
BONUS ROOM CONDITIONED	442
GARAGE	826
COVERED PORCHES	900
TOTAL UNDER ROOF	6,504

1st FLOOR PLAN
1/4" = 1'

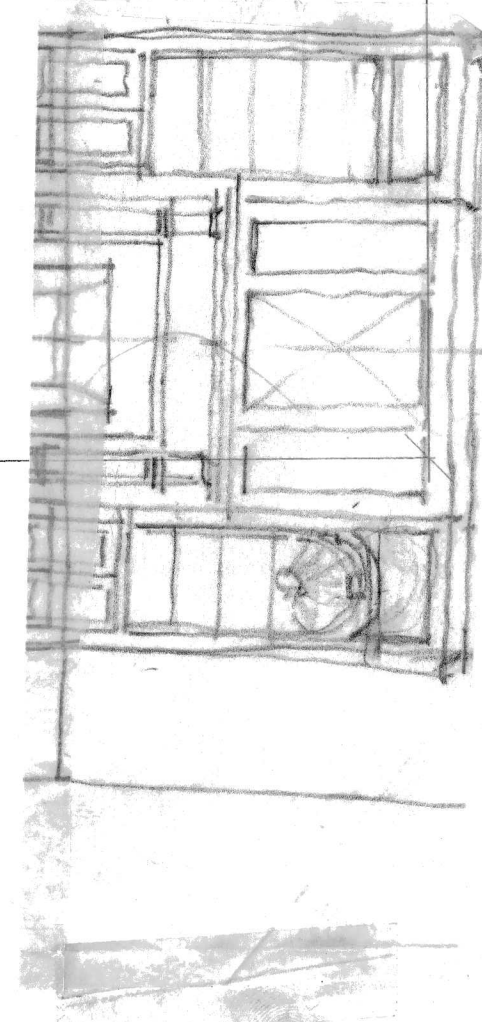



TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

Riley Palmer
Construction Company, Inc.
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161

RFCC Fax# 850-654-1883

ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS



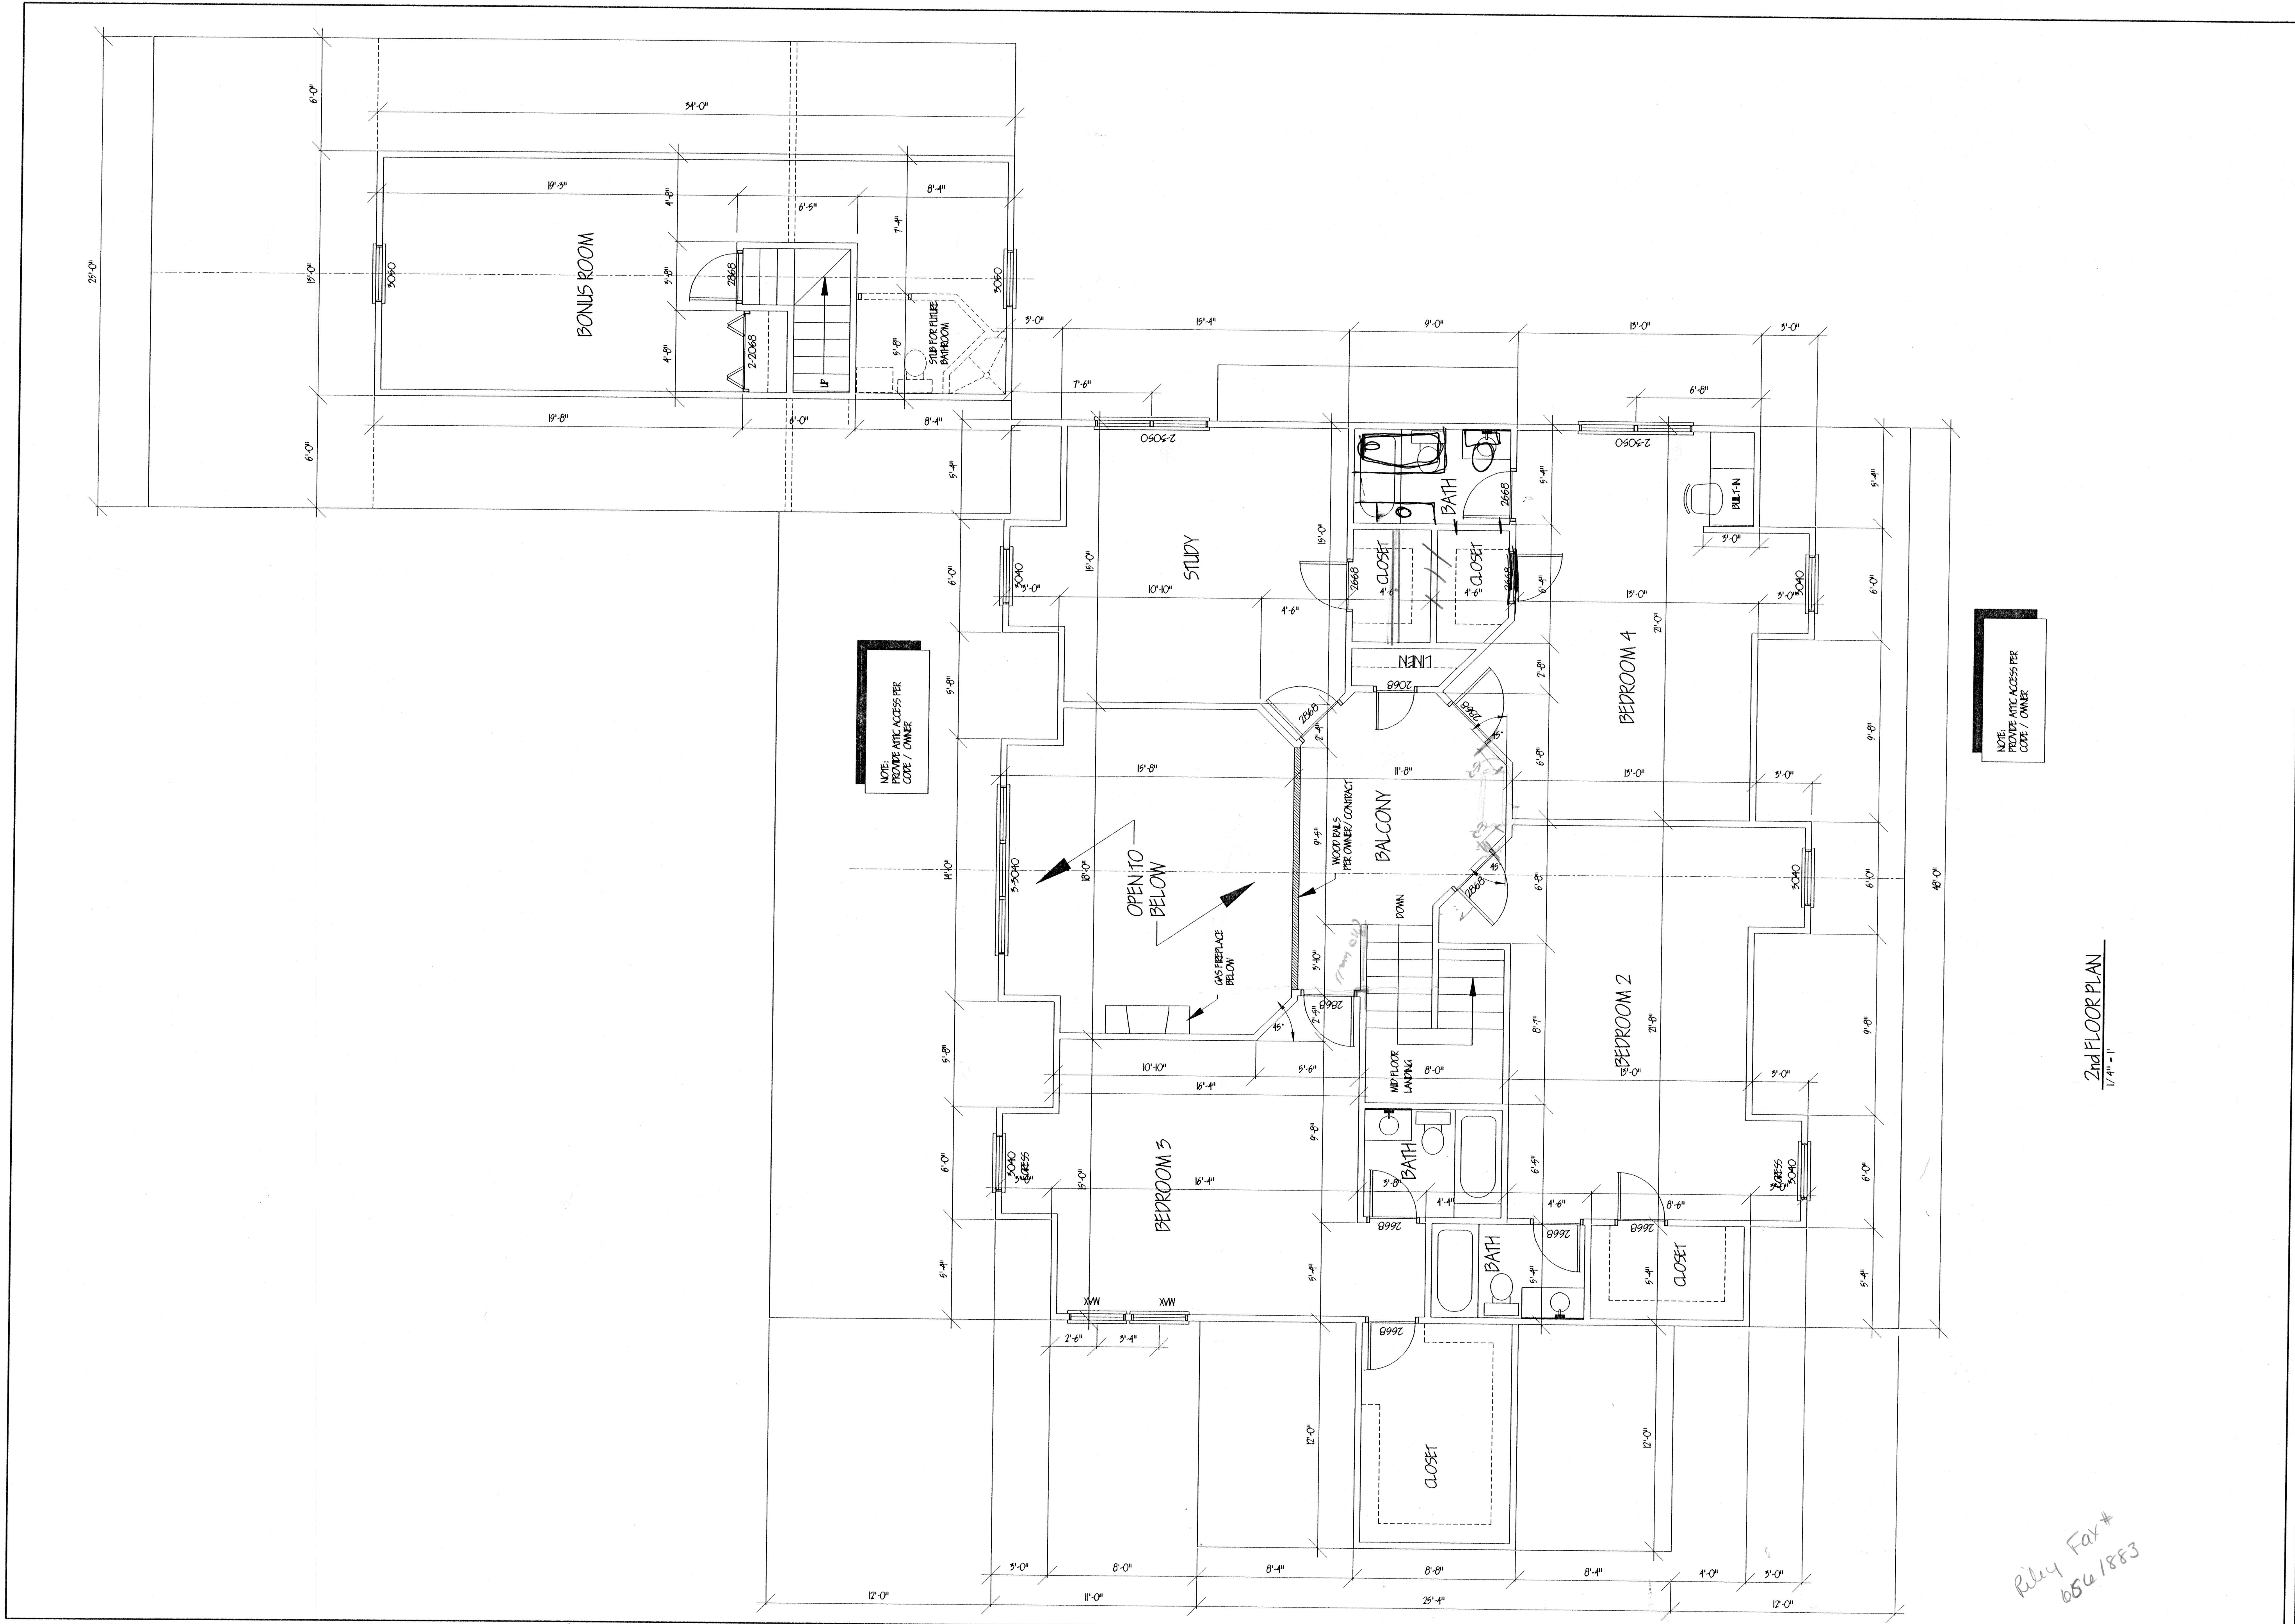

NOTE: PROVIDE A11C ACCESS PER CODE / OWNER

NOTE: PROVIDE A11C ACCESS PER CODE / OWNER


2nd FLOOR PLAN
1/4"=1'


Riley Fax #
656/1883

Riley Palmer
Construction Company, Inc.
RPCC
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161

TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS

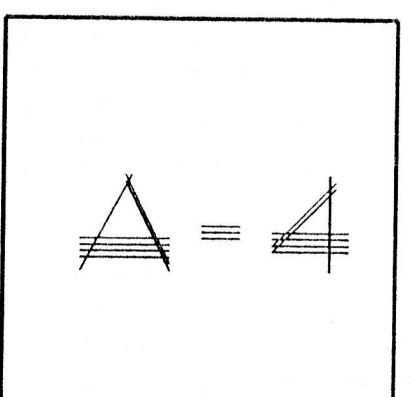

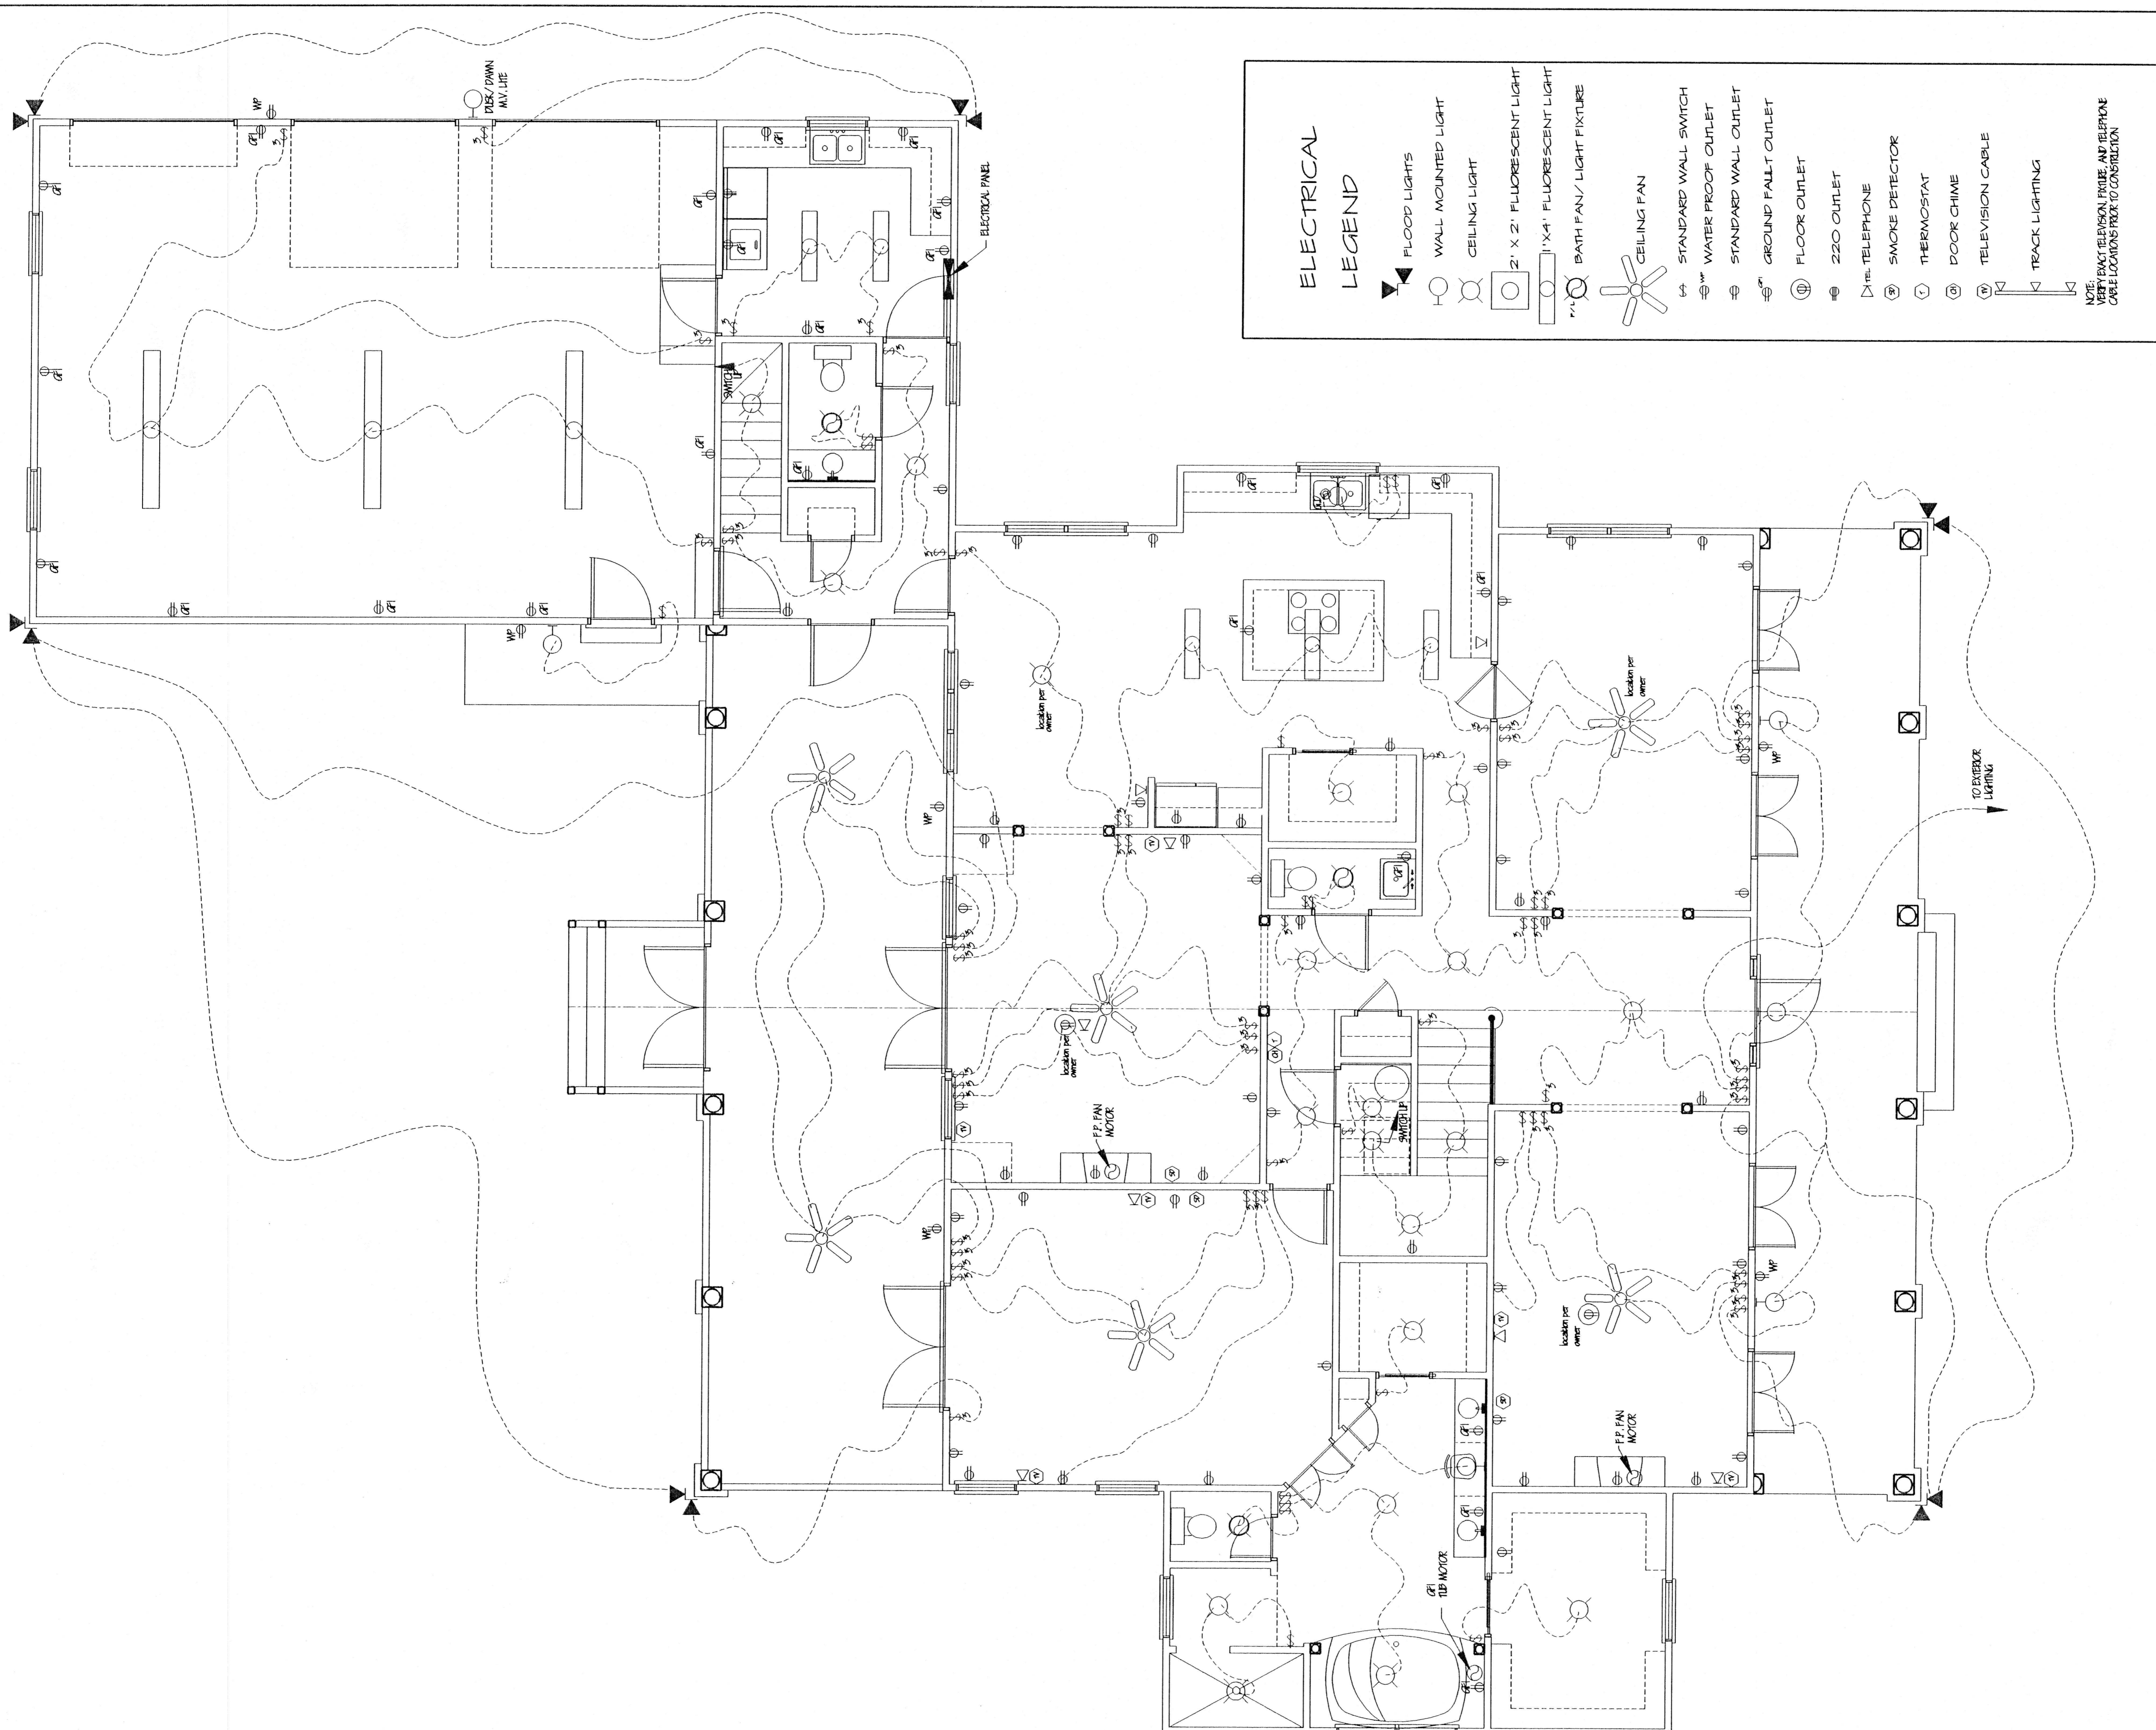

**ELECTRICAL
LEGEND**


- ▲ FLOOD LIGHTS
 - WALL MOUNTED LIGHT
 - CEILING LIGHT
 - 2' X 2' FLUORESCENT LIGHT
 - 1' X 4' FLUORESCENT LIGHT
 - BATH FAN / LIGHT FIXTURE
 - CEILING FAN
 - STANDARD WALL SWITCH
 - WATER PROOF OUTLET
 - STANDARD WALL OUTLET
 - GROUND FAULT OUTLET
 - FLOOR OUTLET
 - 220 OUTLET
 - △ TELEPHONE
 - SMOKE DETECTOR
 - THERMOSTAT
 - DOOR CHIME
 - TELEVISION CABLE
 - TRACK LIGHTING
- NOTE:
VERIFY EXACT TELEVISION, PHONE, AND TELEPHONE
CORD LOCATIONS PRIOR TO CONSTRUCTION


1st FLOOR ELECTRICAL PLAN
1/4" = 1'

TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

Riley Palmer
Construction Company, Inc.
RPCC
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161

ISSUE DATE	
DATE	REMARKS



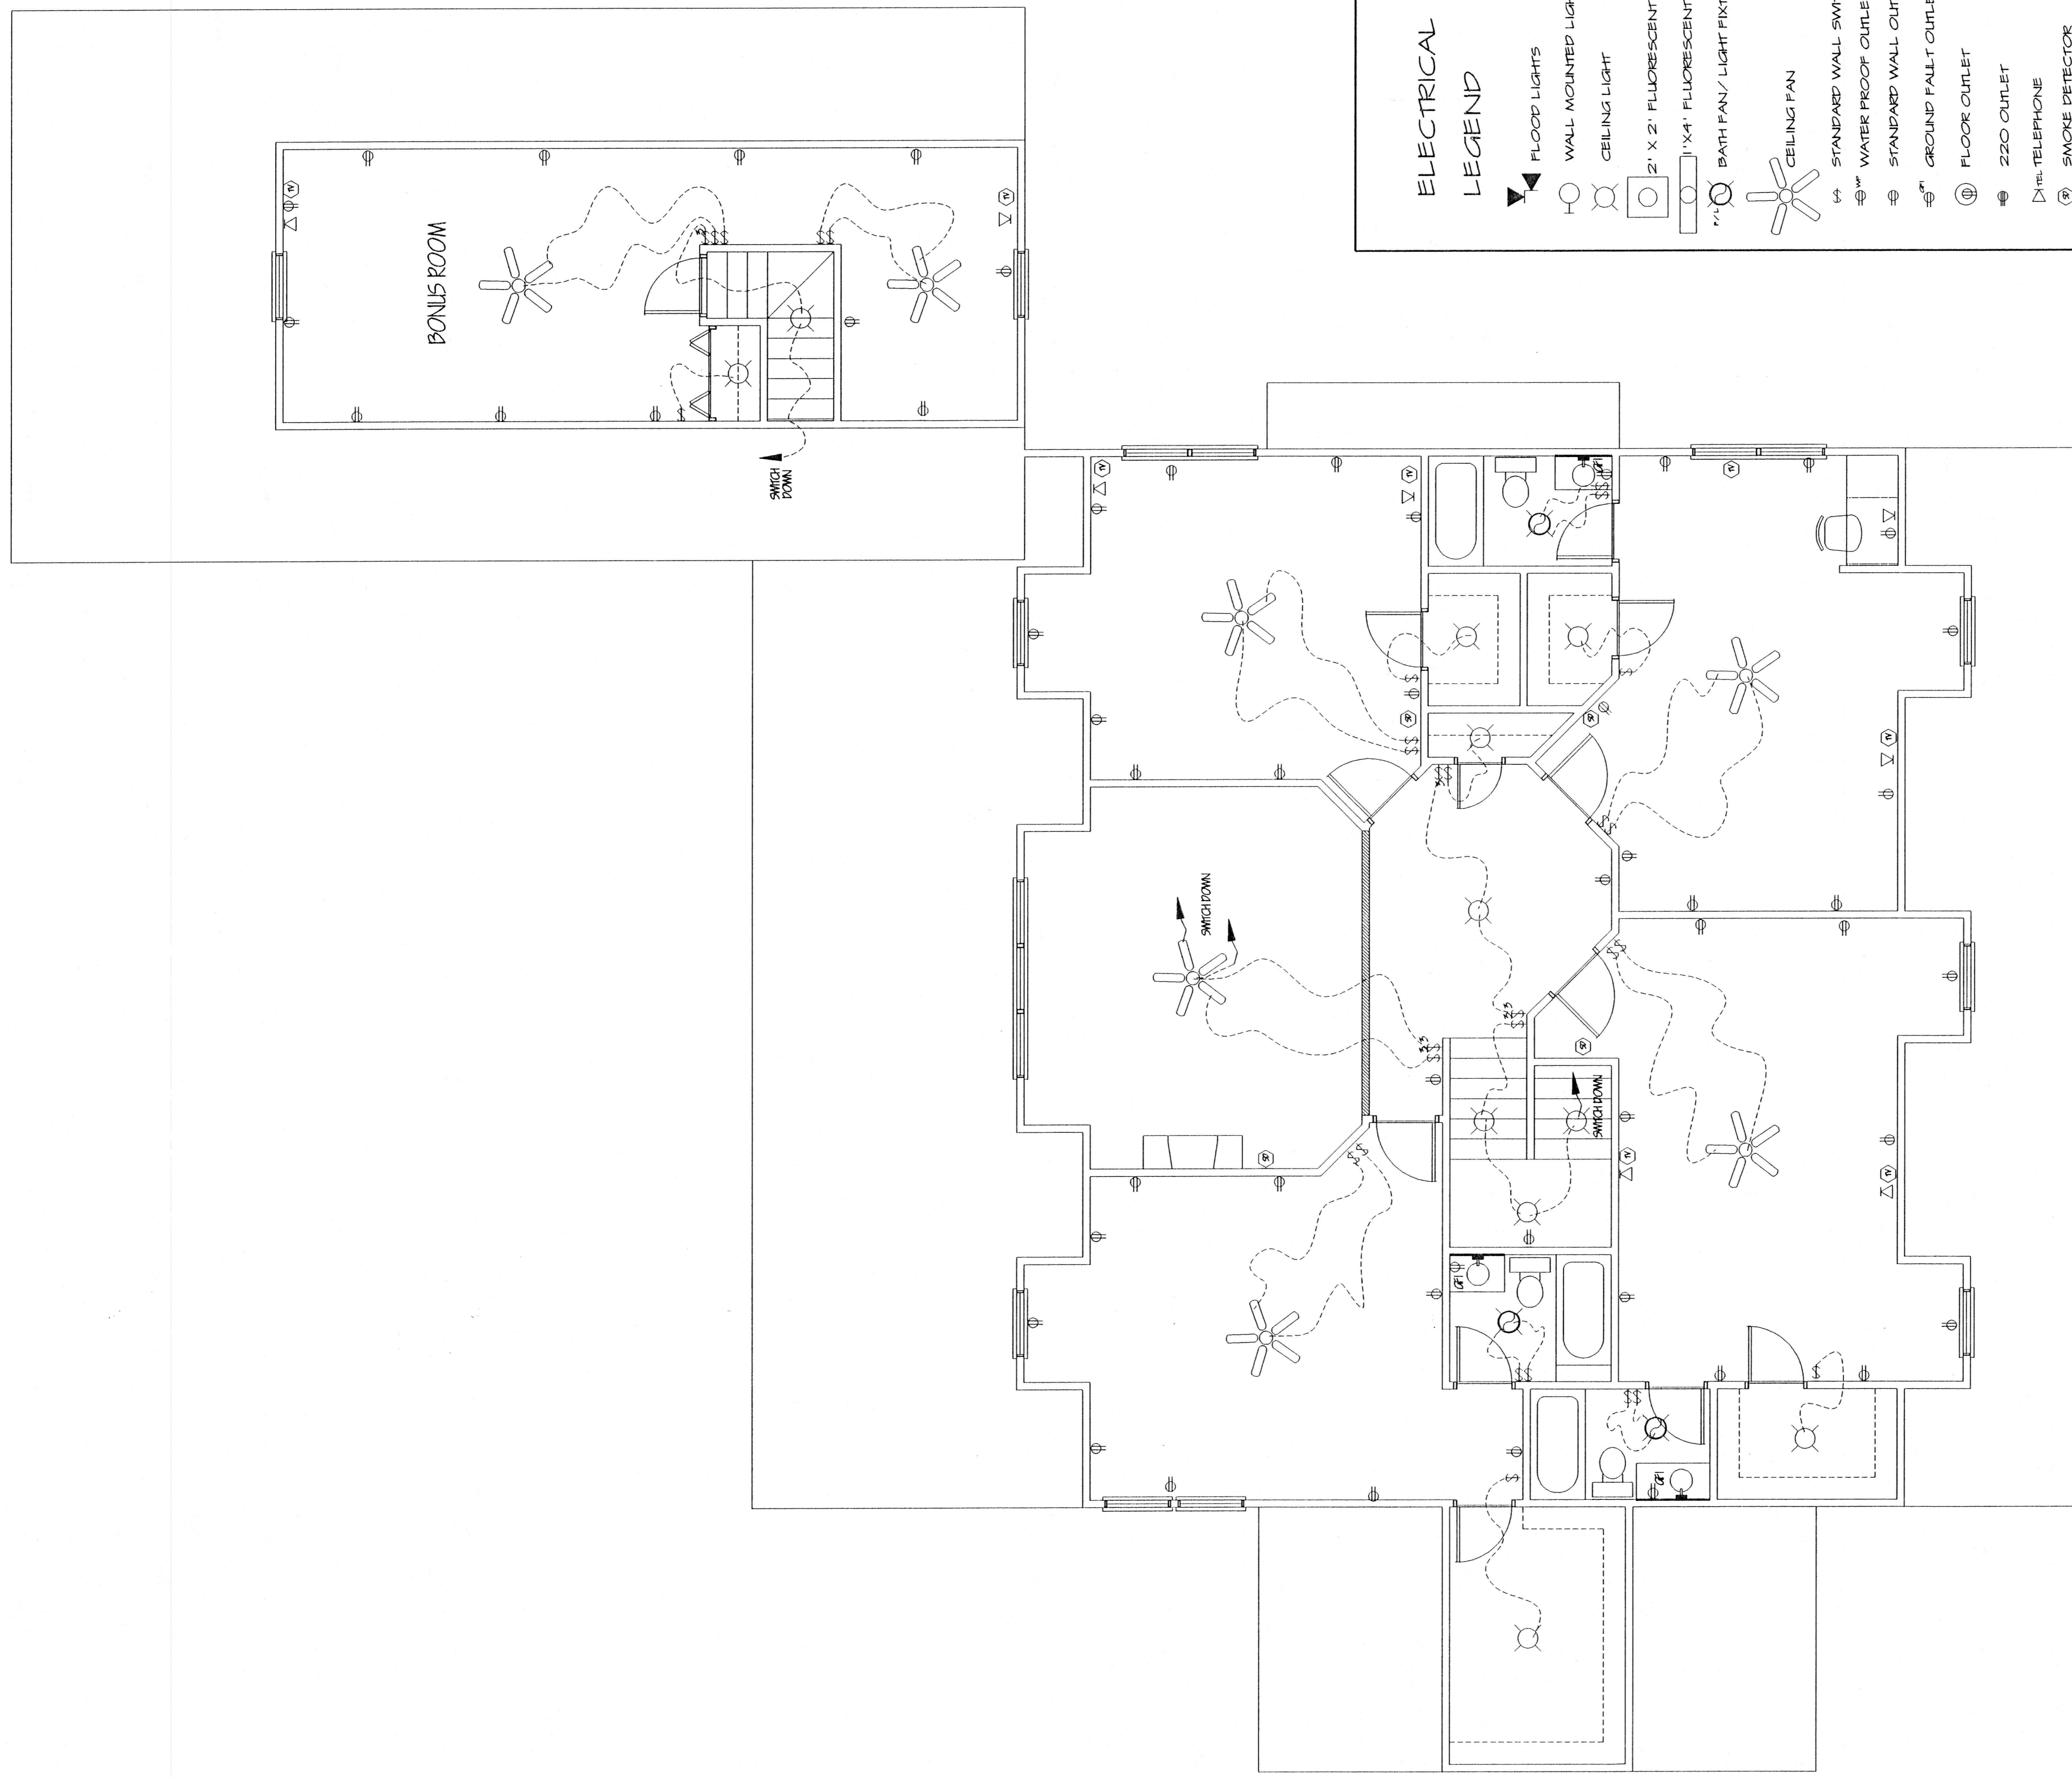

ELECTRICAL LEGEND

- FLOOD LIGHTS
- WALL MOUNTED LIGHT
- CEILING LIGHT
- 2' X 2' FLUORESCENT LIGHT
- 1' X 4' FLUORESCENT LIGHT
- BATH FAN/ LIGHT FIXTURE
- CEILING FAN
- STANDARD WALL SWITCH
- WATER PROOF OUTLET
- STANDARD WALL OUTLET
- GROUND FAULT OUTLET
- FLOOR OUTLET
- 220 OUTLET
- TELEPHONE
- SMOKE DETECTOR
- THERMOSTAT
- DOOR CHIME
- TELEVISION CABLE
- TRACK LIGHTING


NOTE: VERIFY EXACT TELEVISION WIRE AND TELEPHONE CABLE LOCATIONS PRIOR TO CONSTRUCTION.

2nd FLOOR ELECTRICAL PLAN
1/4" = 1'


ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS

Riley Palmer
Construction Company, Inc.
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161


TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

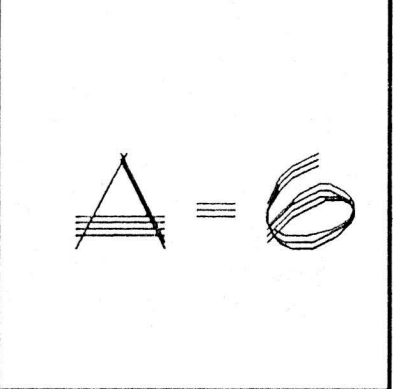



TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

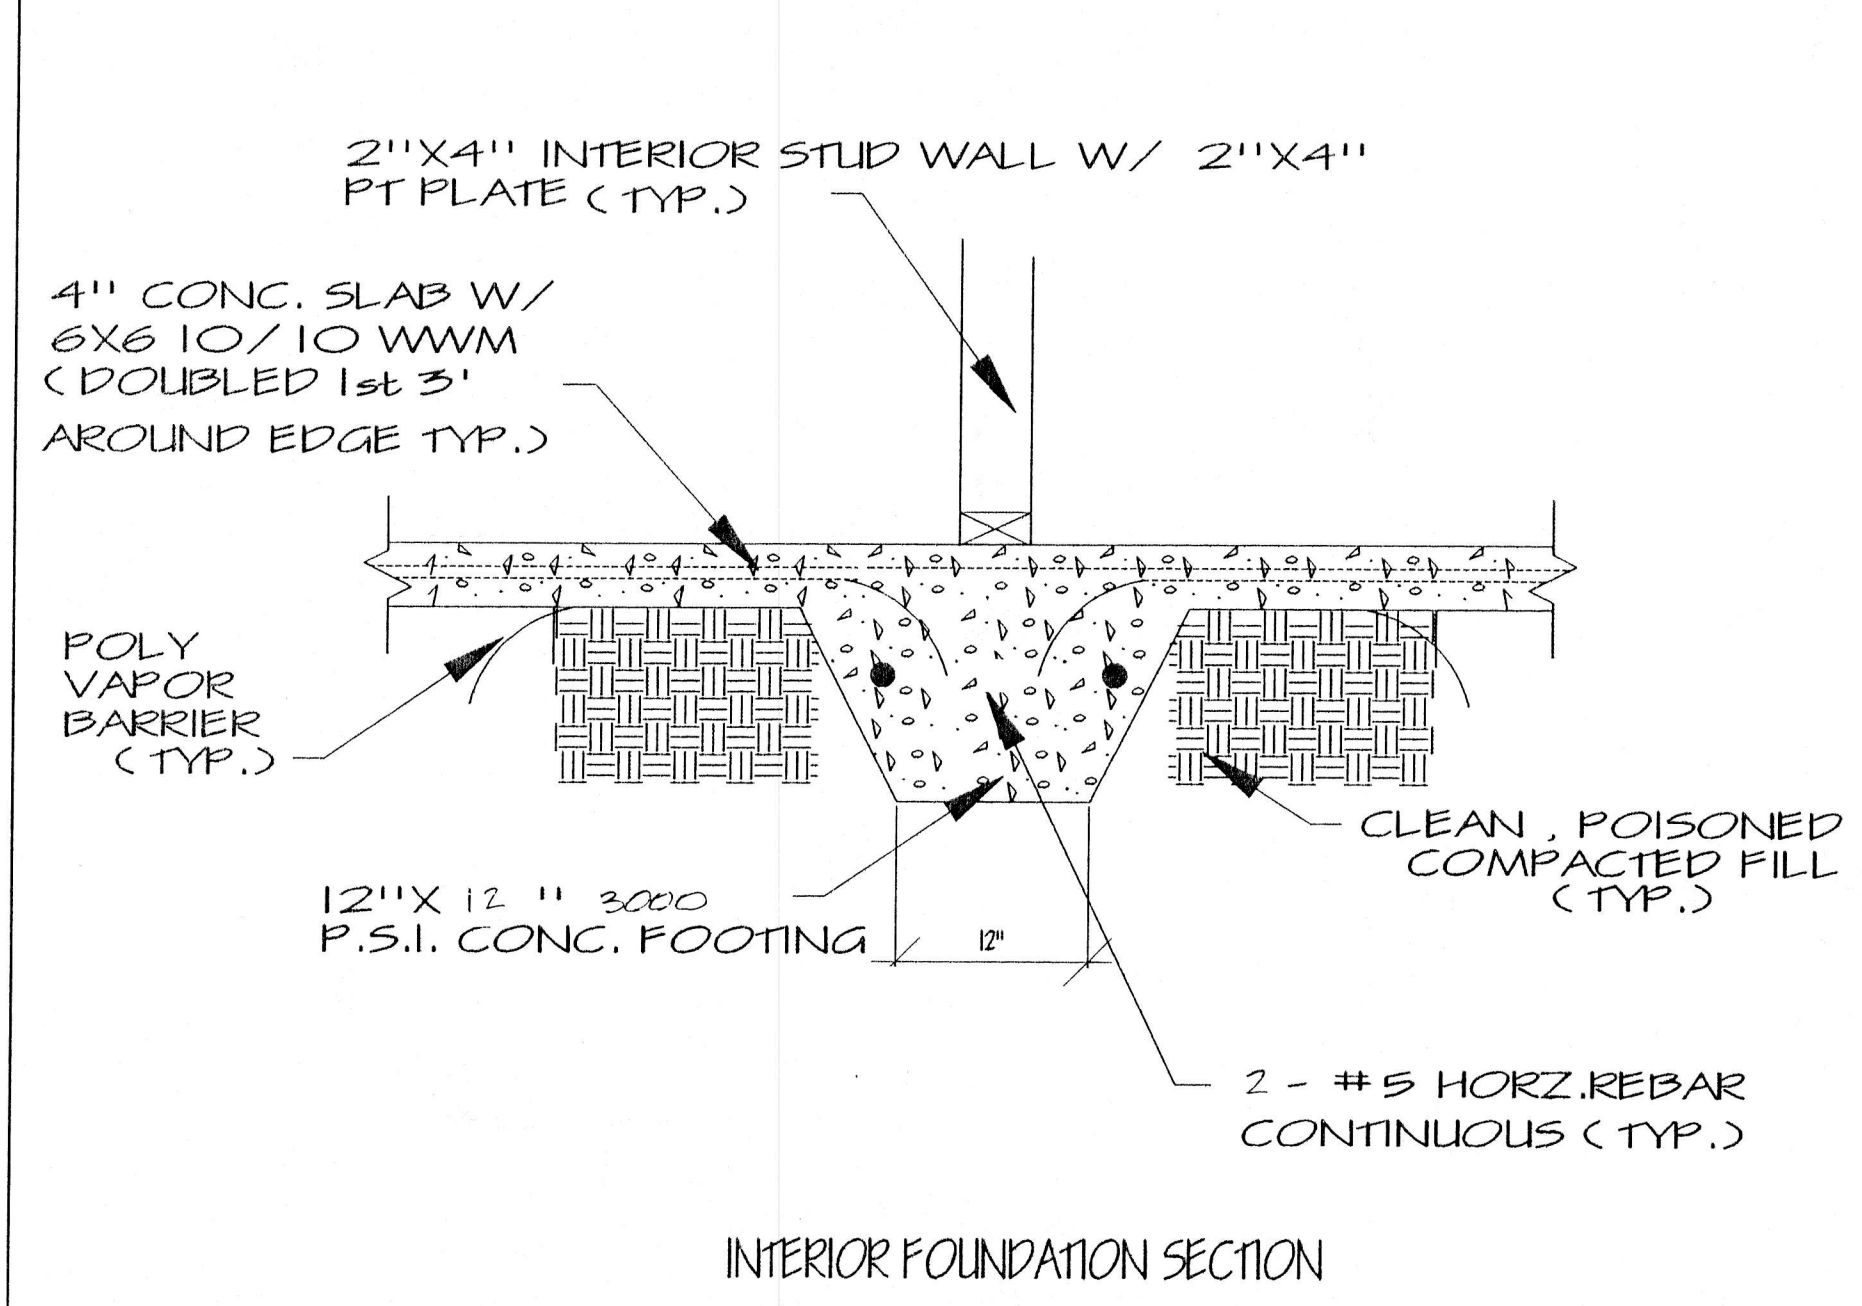


INTERIOR FOUNDATION SECTION

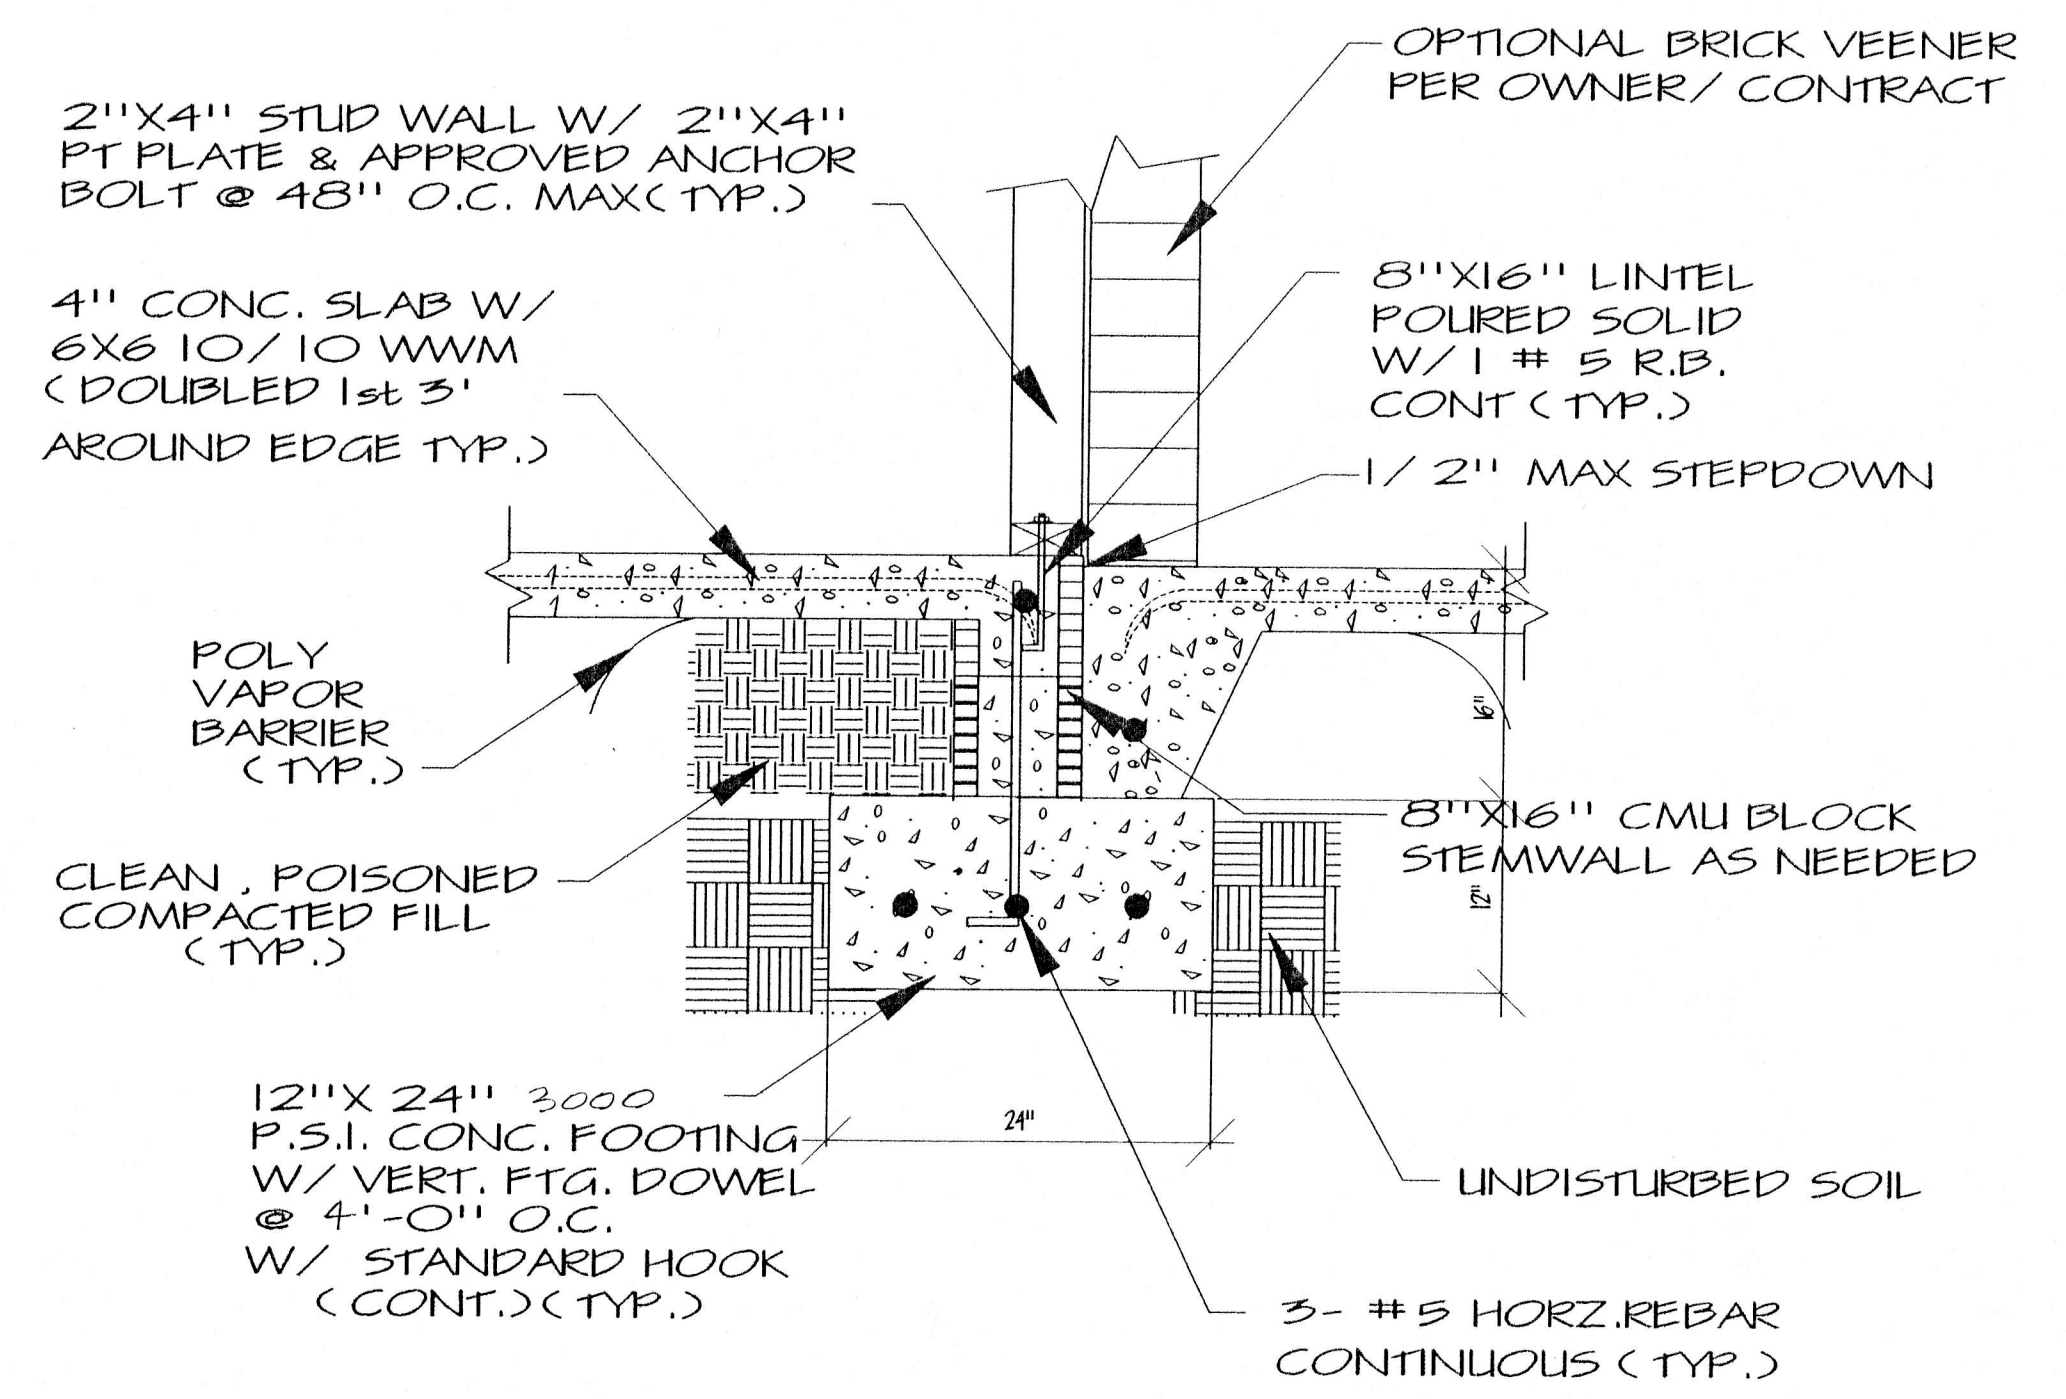

A FOUNDATION SECTION
1" = 1'

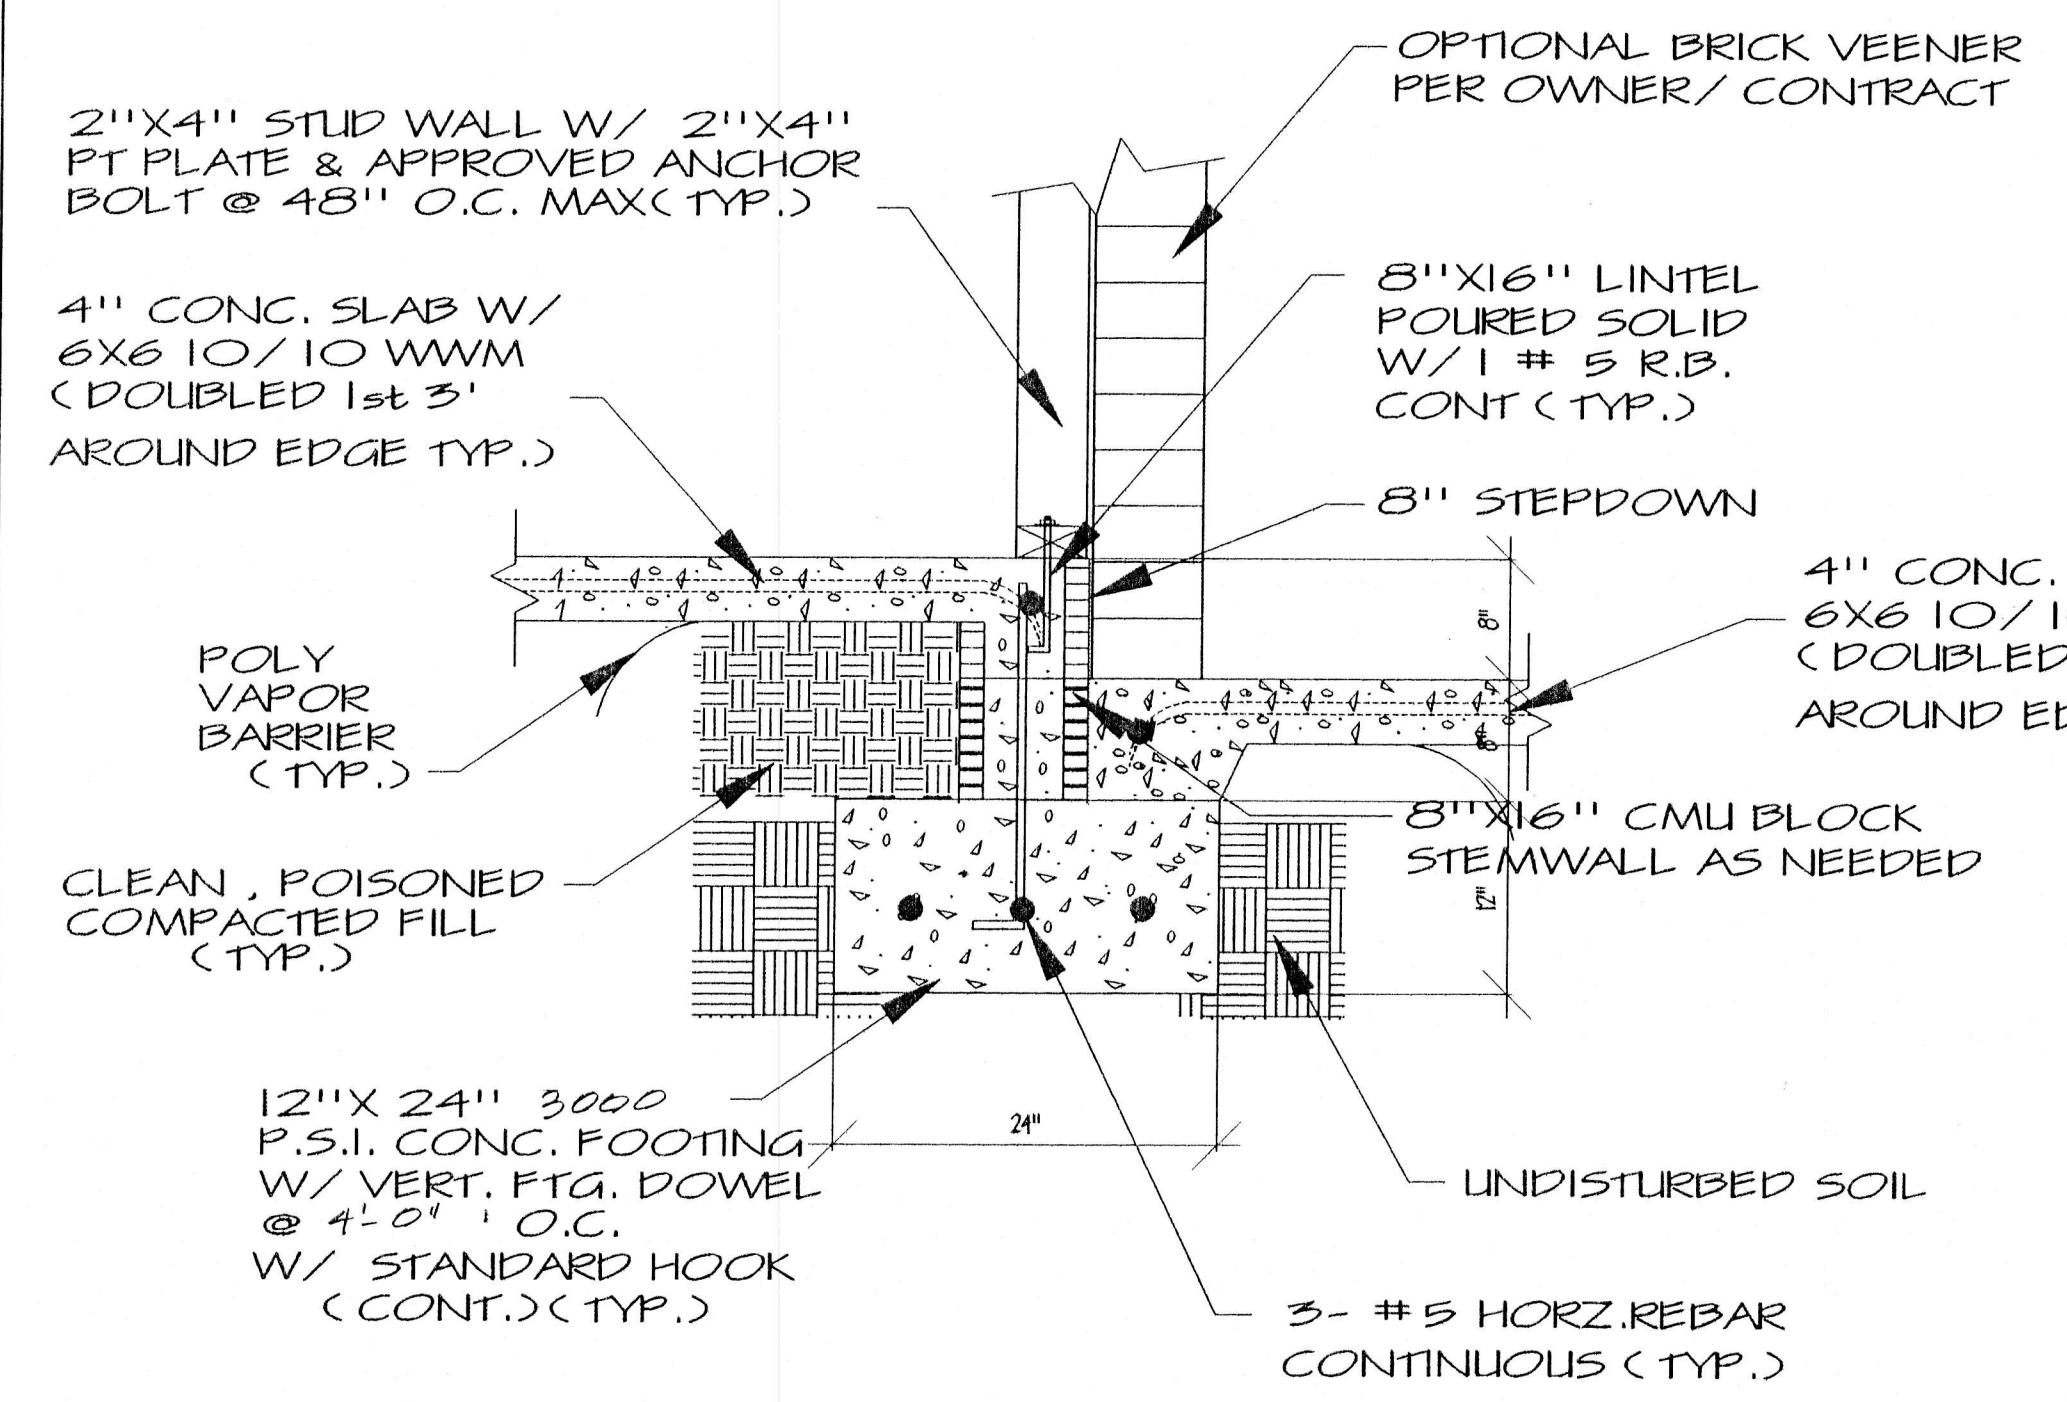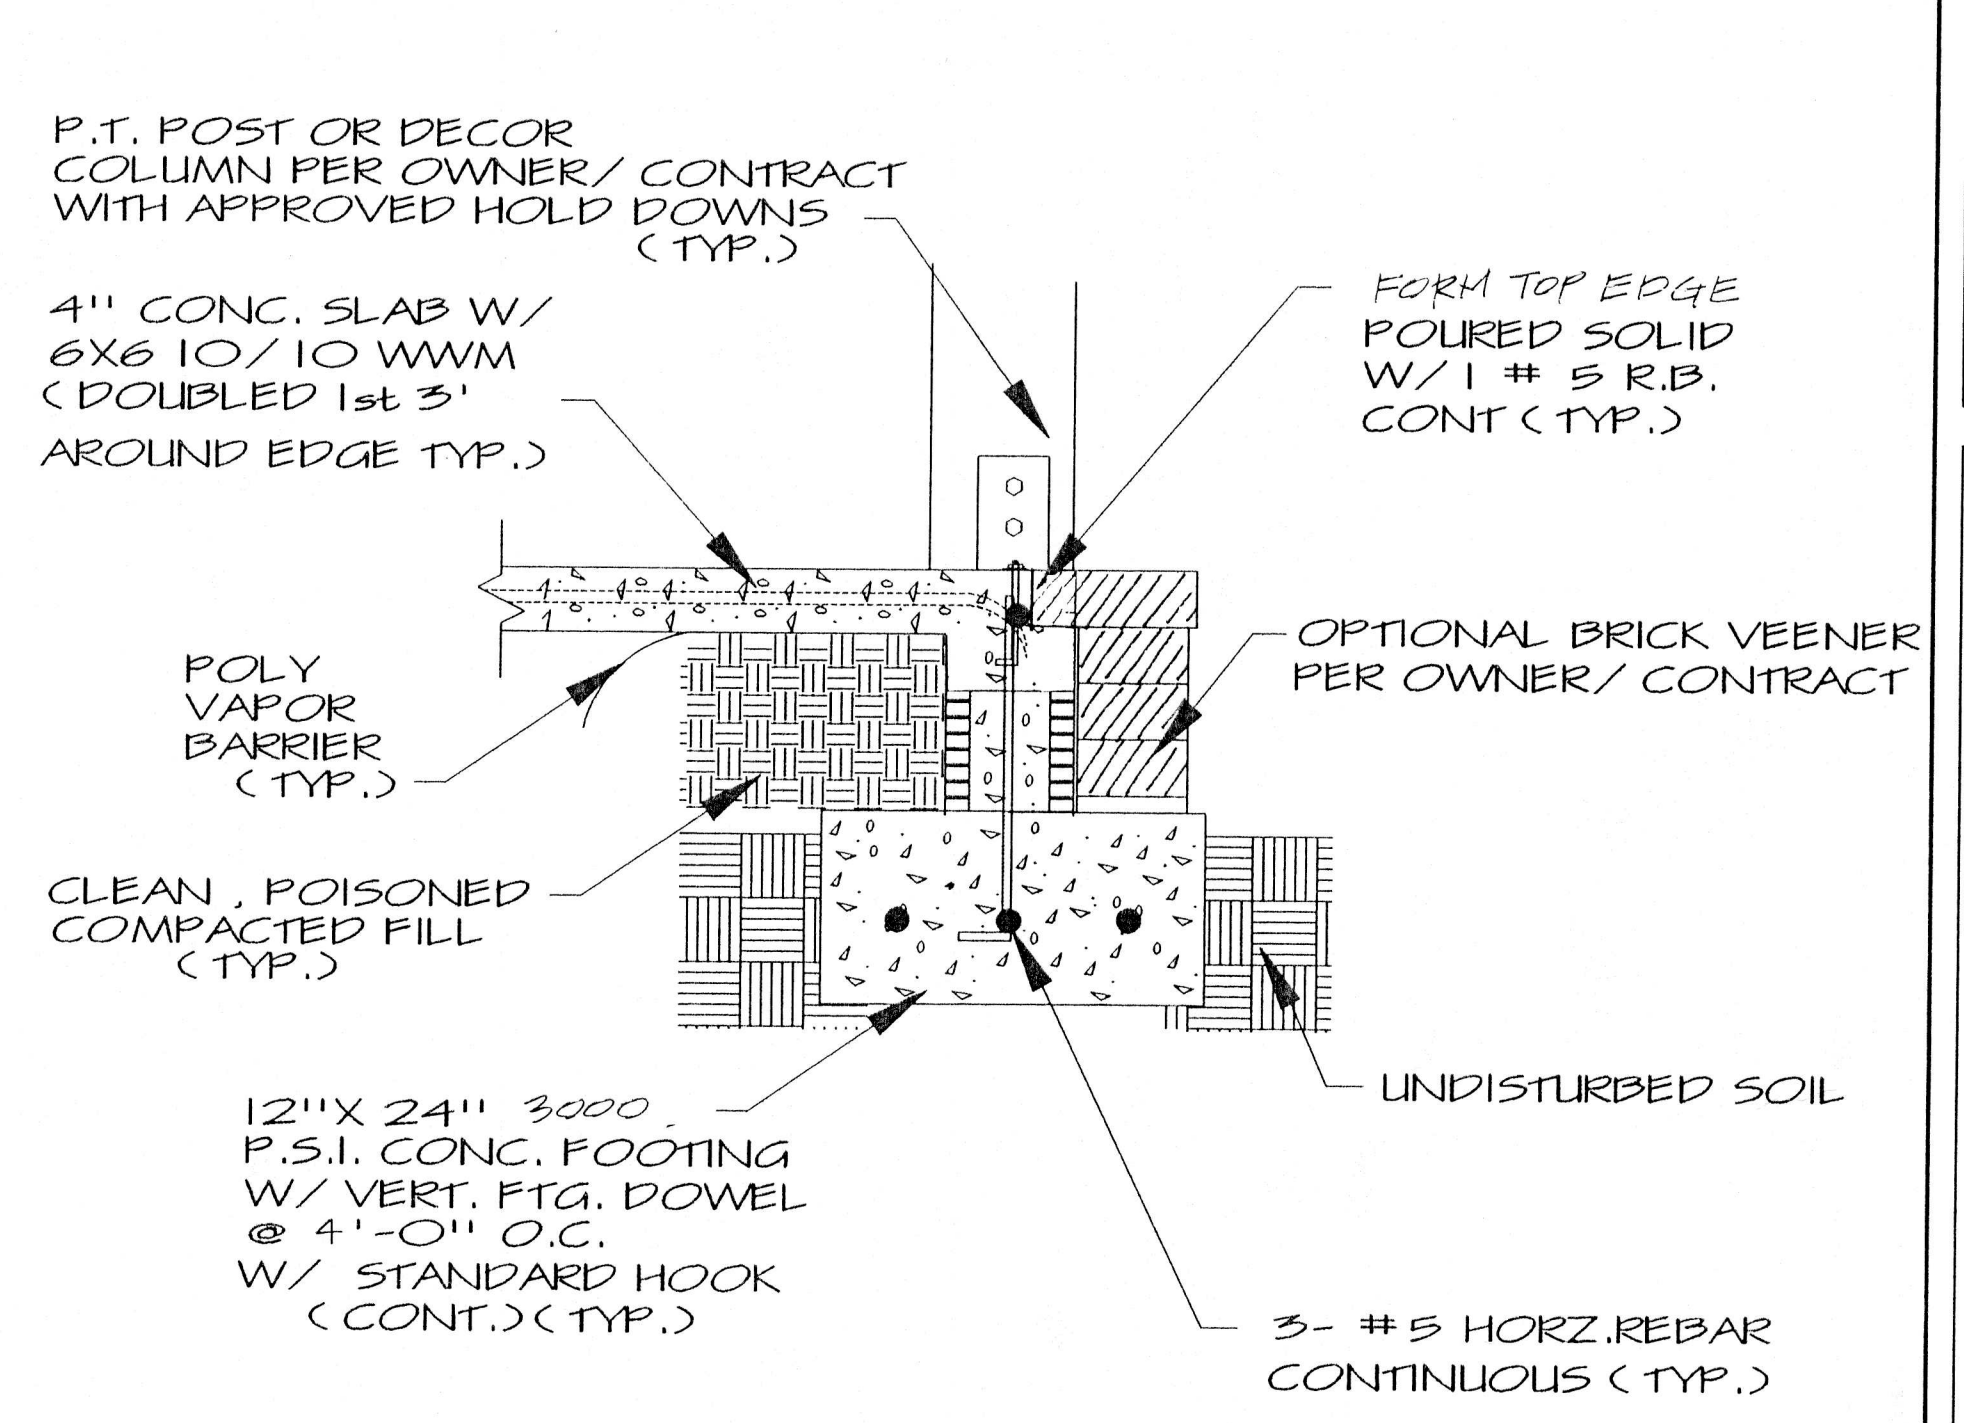

B FOUNDATION SECTION
1" = 1'

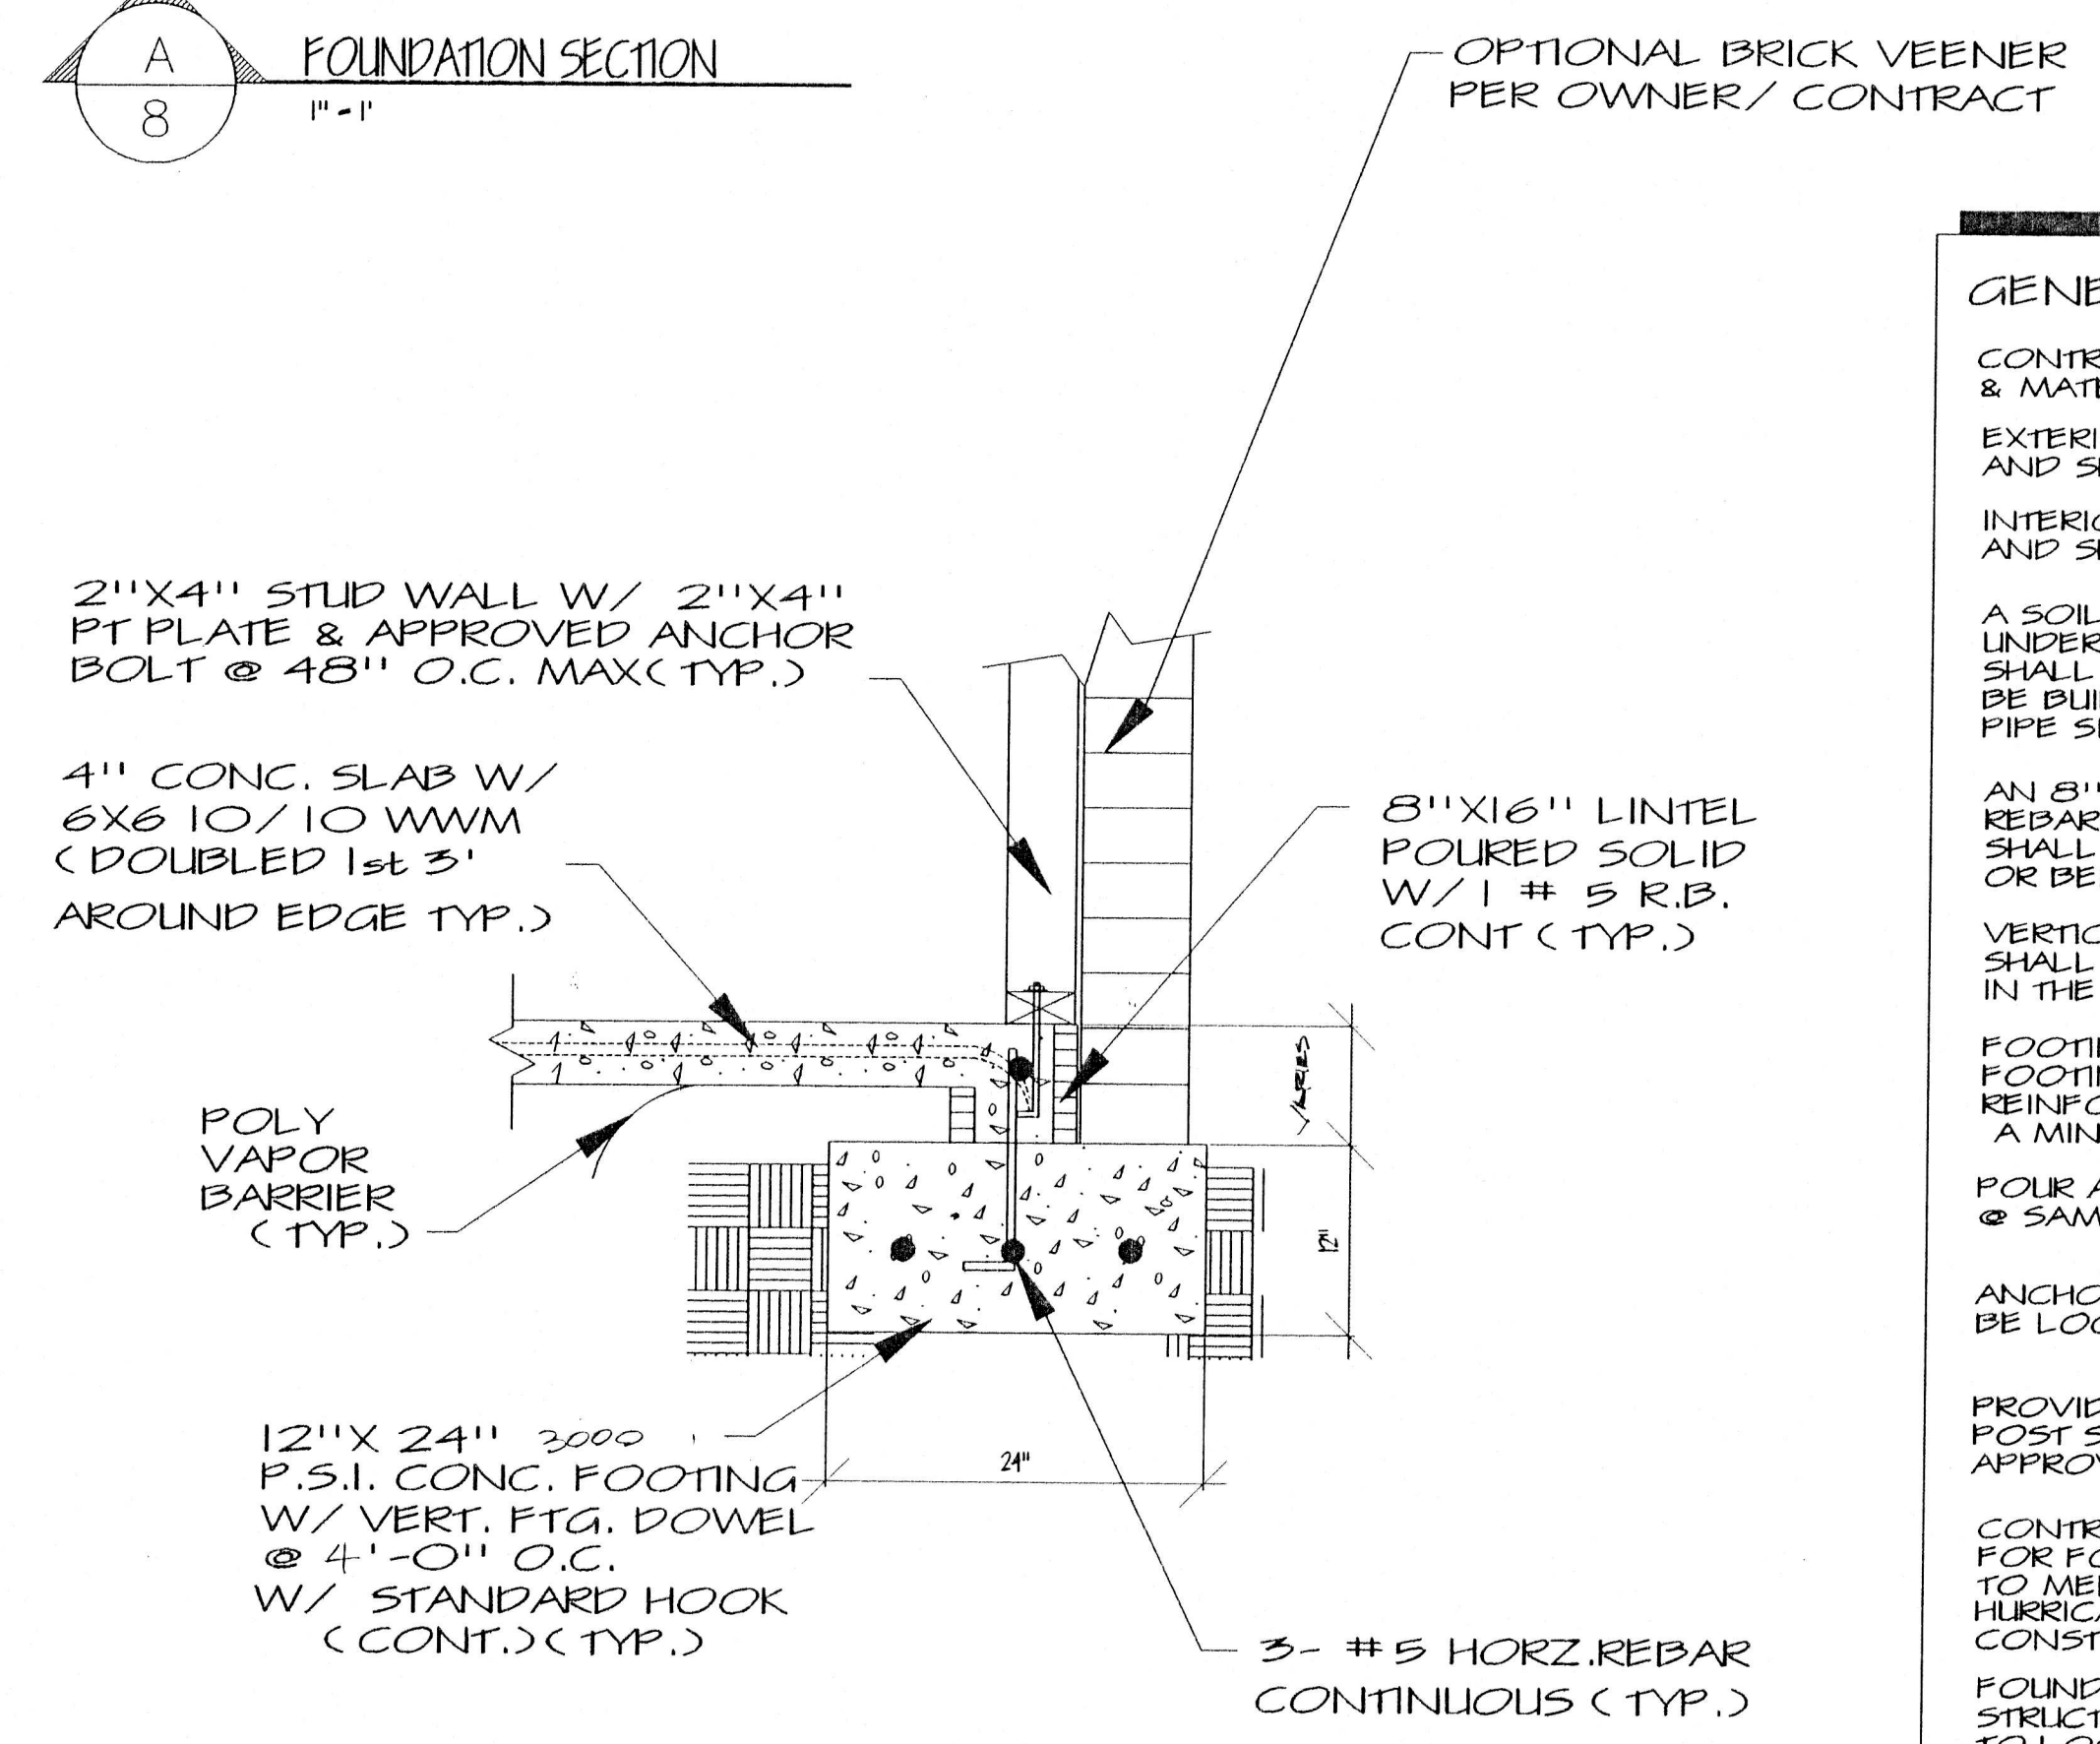

GENERAL FOUNDATION NOTES:

CONTRACTOR & SUBCONTRACTORS TO VERIFY ALL DIMENSIONS & MATERIALS BEFORE BEGINNING CONSTRUCTION.

EXTERIOR FOOTINGS SHALL BE A MIN. 24" WIDE BY 12" DEEP AND SHALL BE REINFORCED WITH THREE # 5 REBARS (CONT.)

INTERIOR FOOTINGS SHALL BE A MIN. 12" WIDE BY 12" DEEP AND SHALL BE REINFORCED WITH THREE # 5 REBARS (CONT.)

A SOIL OR WASTE PIPE OR BUILDING DRAIN PASSING UNDER A FOOTING OR THRU A FOUNDATION WALL SHALL BE PROVIDED WITH A RELIEVING ARCH, OR THERE SHALL BE BUILT INTO THE MASONRY WALL AN IRON PIPE SLEEVE TWO PIPE SIZES GREATER THAN THE PIPE PASSING THRU

AN 8" X 8" CONC. OR CMU BOND BEAM WITH ONE # 5 REBAR SHALL BE USED AT THE FLOOR LEVEL. REINFORCING SHALL BE CONTINUOUS AT CORNERS BY USE OF CORNER BARS OR BENDING (MIN LAP 25")

VERTICAL REINFORCEMENT CONSISTING OF ONE # 5 REBAR SHALL BE USED @ 4'-0" ON CENTER AND SHALL TERMINATE IN THE BOND BEAM & FOOTER WITH A STANDARD HOOK

FOOTING DOWEL BARS EMBEDDED A MIN. OF 6" INTO THE FOOTING SHALL BE PROVIDED FOR ALL REQUIRED VERT. REINFORCEMENT. DOWELS SHALL LAP WALL REINFORCEMENT A MIN. OF 25"

POUR ALL FOUNDATION FOOTINGS @ SAME ELEVATION WHEN POSSIBLE.


ANCHOR BOLTS SHALL HAVE A MIN EMBEDMENT OF 6" , AND BE LOCATED IN ALL CORNERS AND @ 48" O.C. MAX.




PROVIDE ANCHOR BOLTS @ ALL POST SUPPORT LOCATIONS FOR APPROVED HOLD-DOWN CONNECTORS

CONTRACTOR AND SUBCONTRACTORS ARE RESPONSIBLE FOR FOUNDATION MATERIALS & CONSTRUCTION TO MEET ALL LOCAL AND STATE CODES FOR HURRICANE RESISTANT RESIDENTIAL CONSTRUCTION.

FOUNDATION SPECIFICATIONS AND STRUCTURAL COMPONENTS SUBJECT TO LOCAL FLOOD, SOIL, AND BUILDING CODE REQUIREMENTS; GEOGRAPHICAL AND JURISDICTIONAL BUILDING CUSTOMS SHALL SUPERSEDE SPECIFICATIONS CONTAINED HEREIN.


ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS

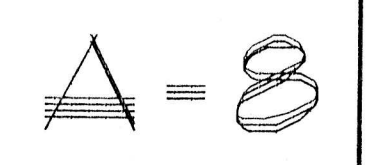

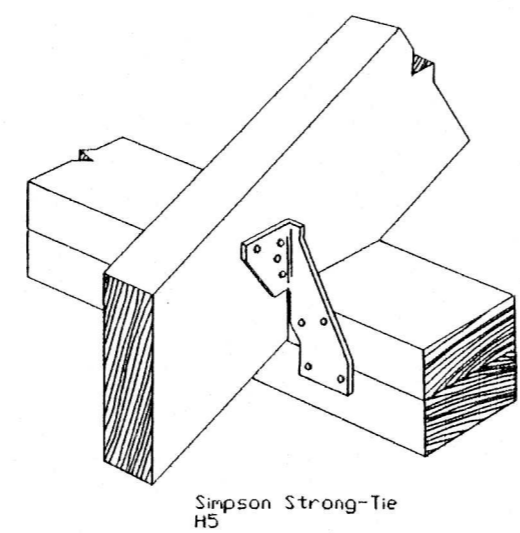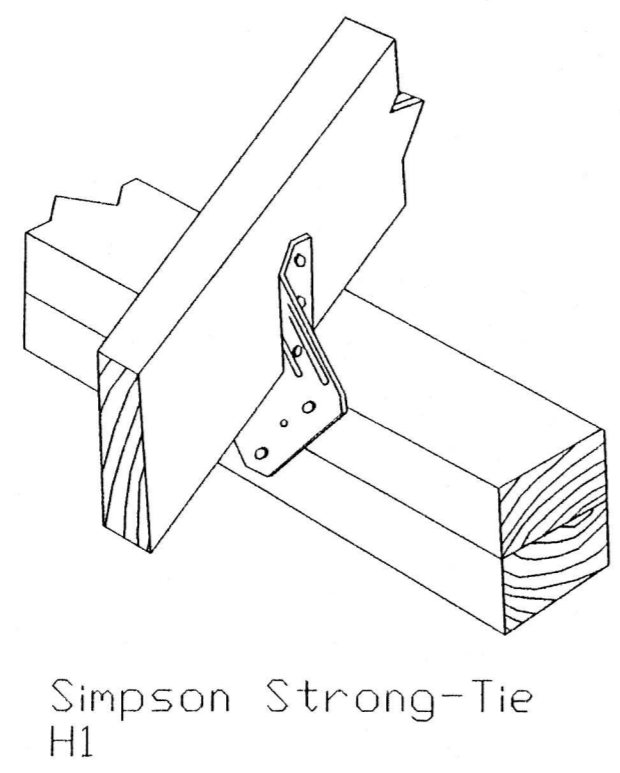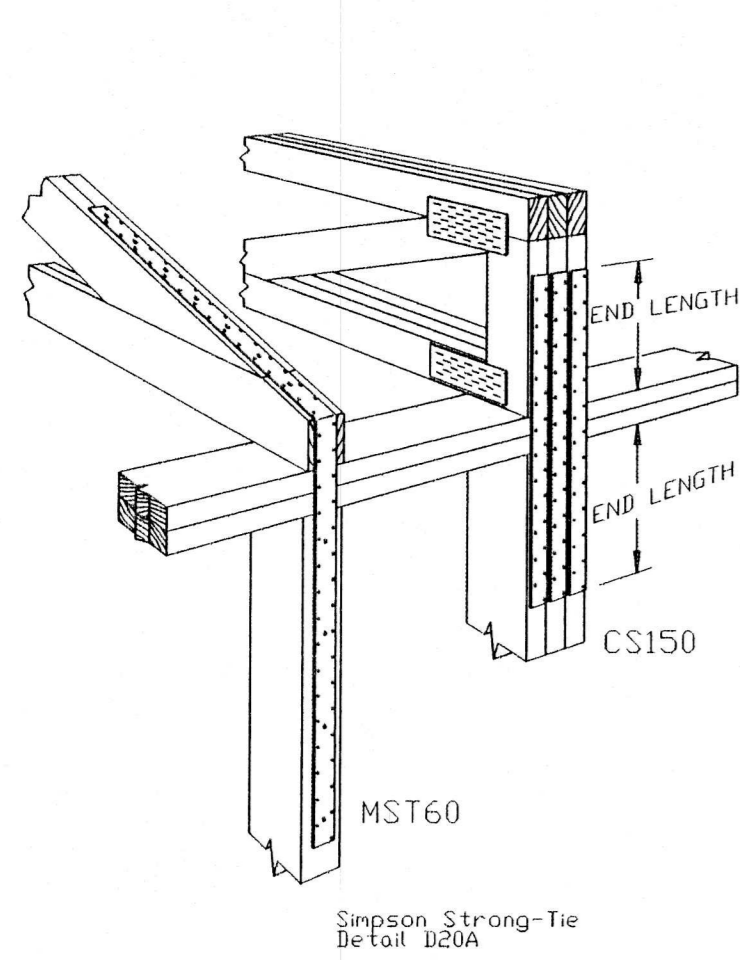



TYP. FRAME DETAILS

N15

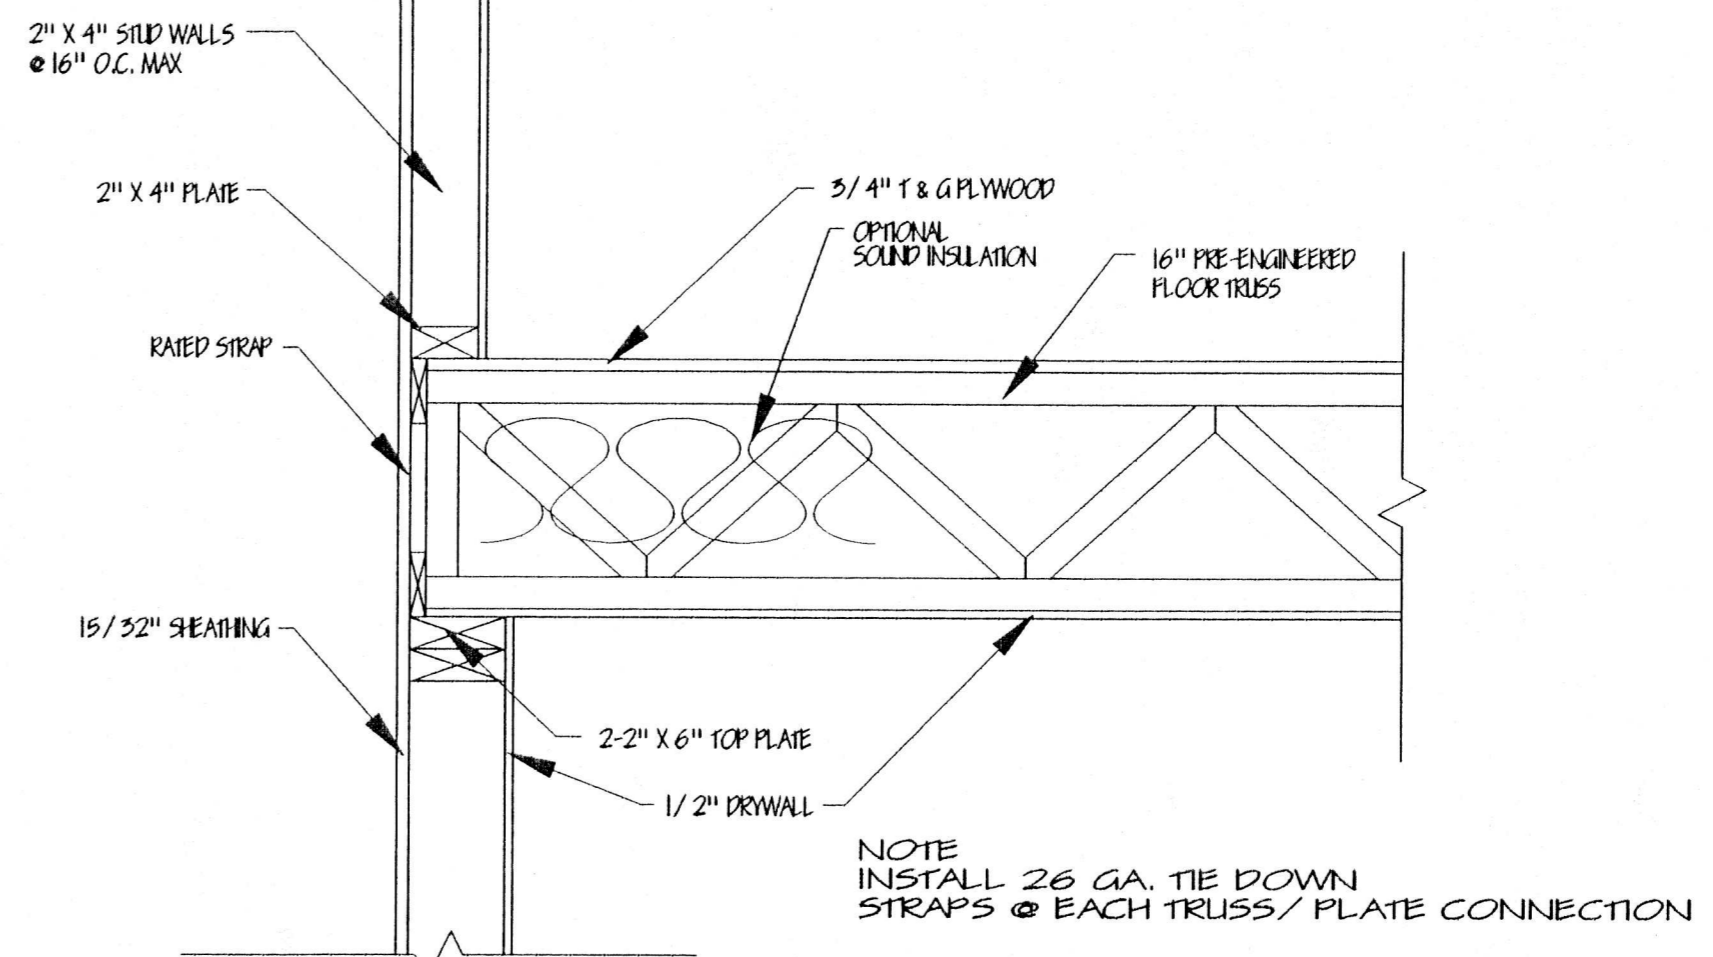

GENERAL NOTES:

ALL WOOD FRAMING SHALL BE # 2 SOUTHERN YELLOW PINE AS GRADE MARKED BY THE SOUTHERN PINE INSPECTION BUREAU W/ FB - 12,00 PSI & E - 1,500,000 PSI OR GREATER
 INSTALL BLOCKING AS REQUIRED TO SUPPORT SHEATHING & FINISH MATERIALS
 VERIFY ROUGH DOOR & WINDOW OPENINGS W/ SUPPLIER PRIOR TO CONSTRUCTION
 ALL ROOF TRUSSES SHALL BE PRE-ENGINEERED FOR SPAN & WIND CONDITIONS AND SHALL BE CERTIFIED BY THE MANUFACTURER FOR A DESIGN LIVE LOAD
 INSTALL HURRICANE CLIPS AS PER LOCAL CODE AT EACH TRUSS CONNECTIONS

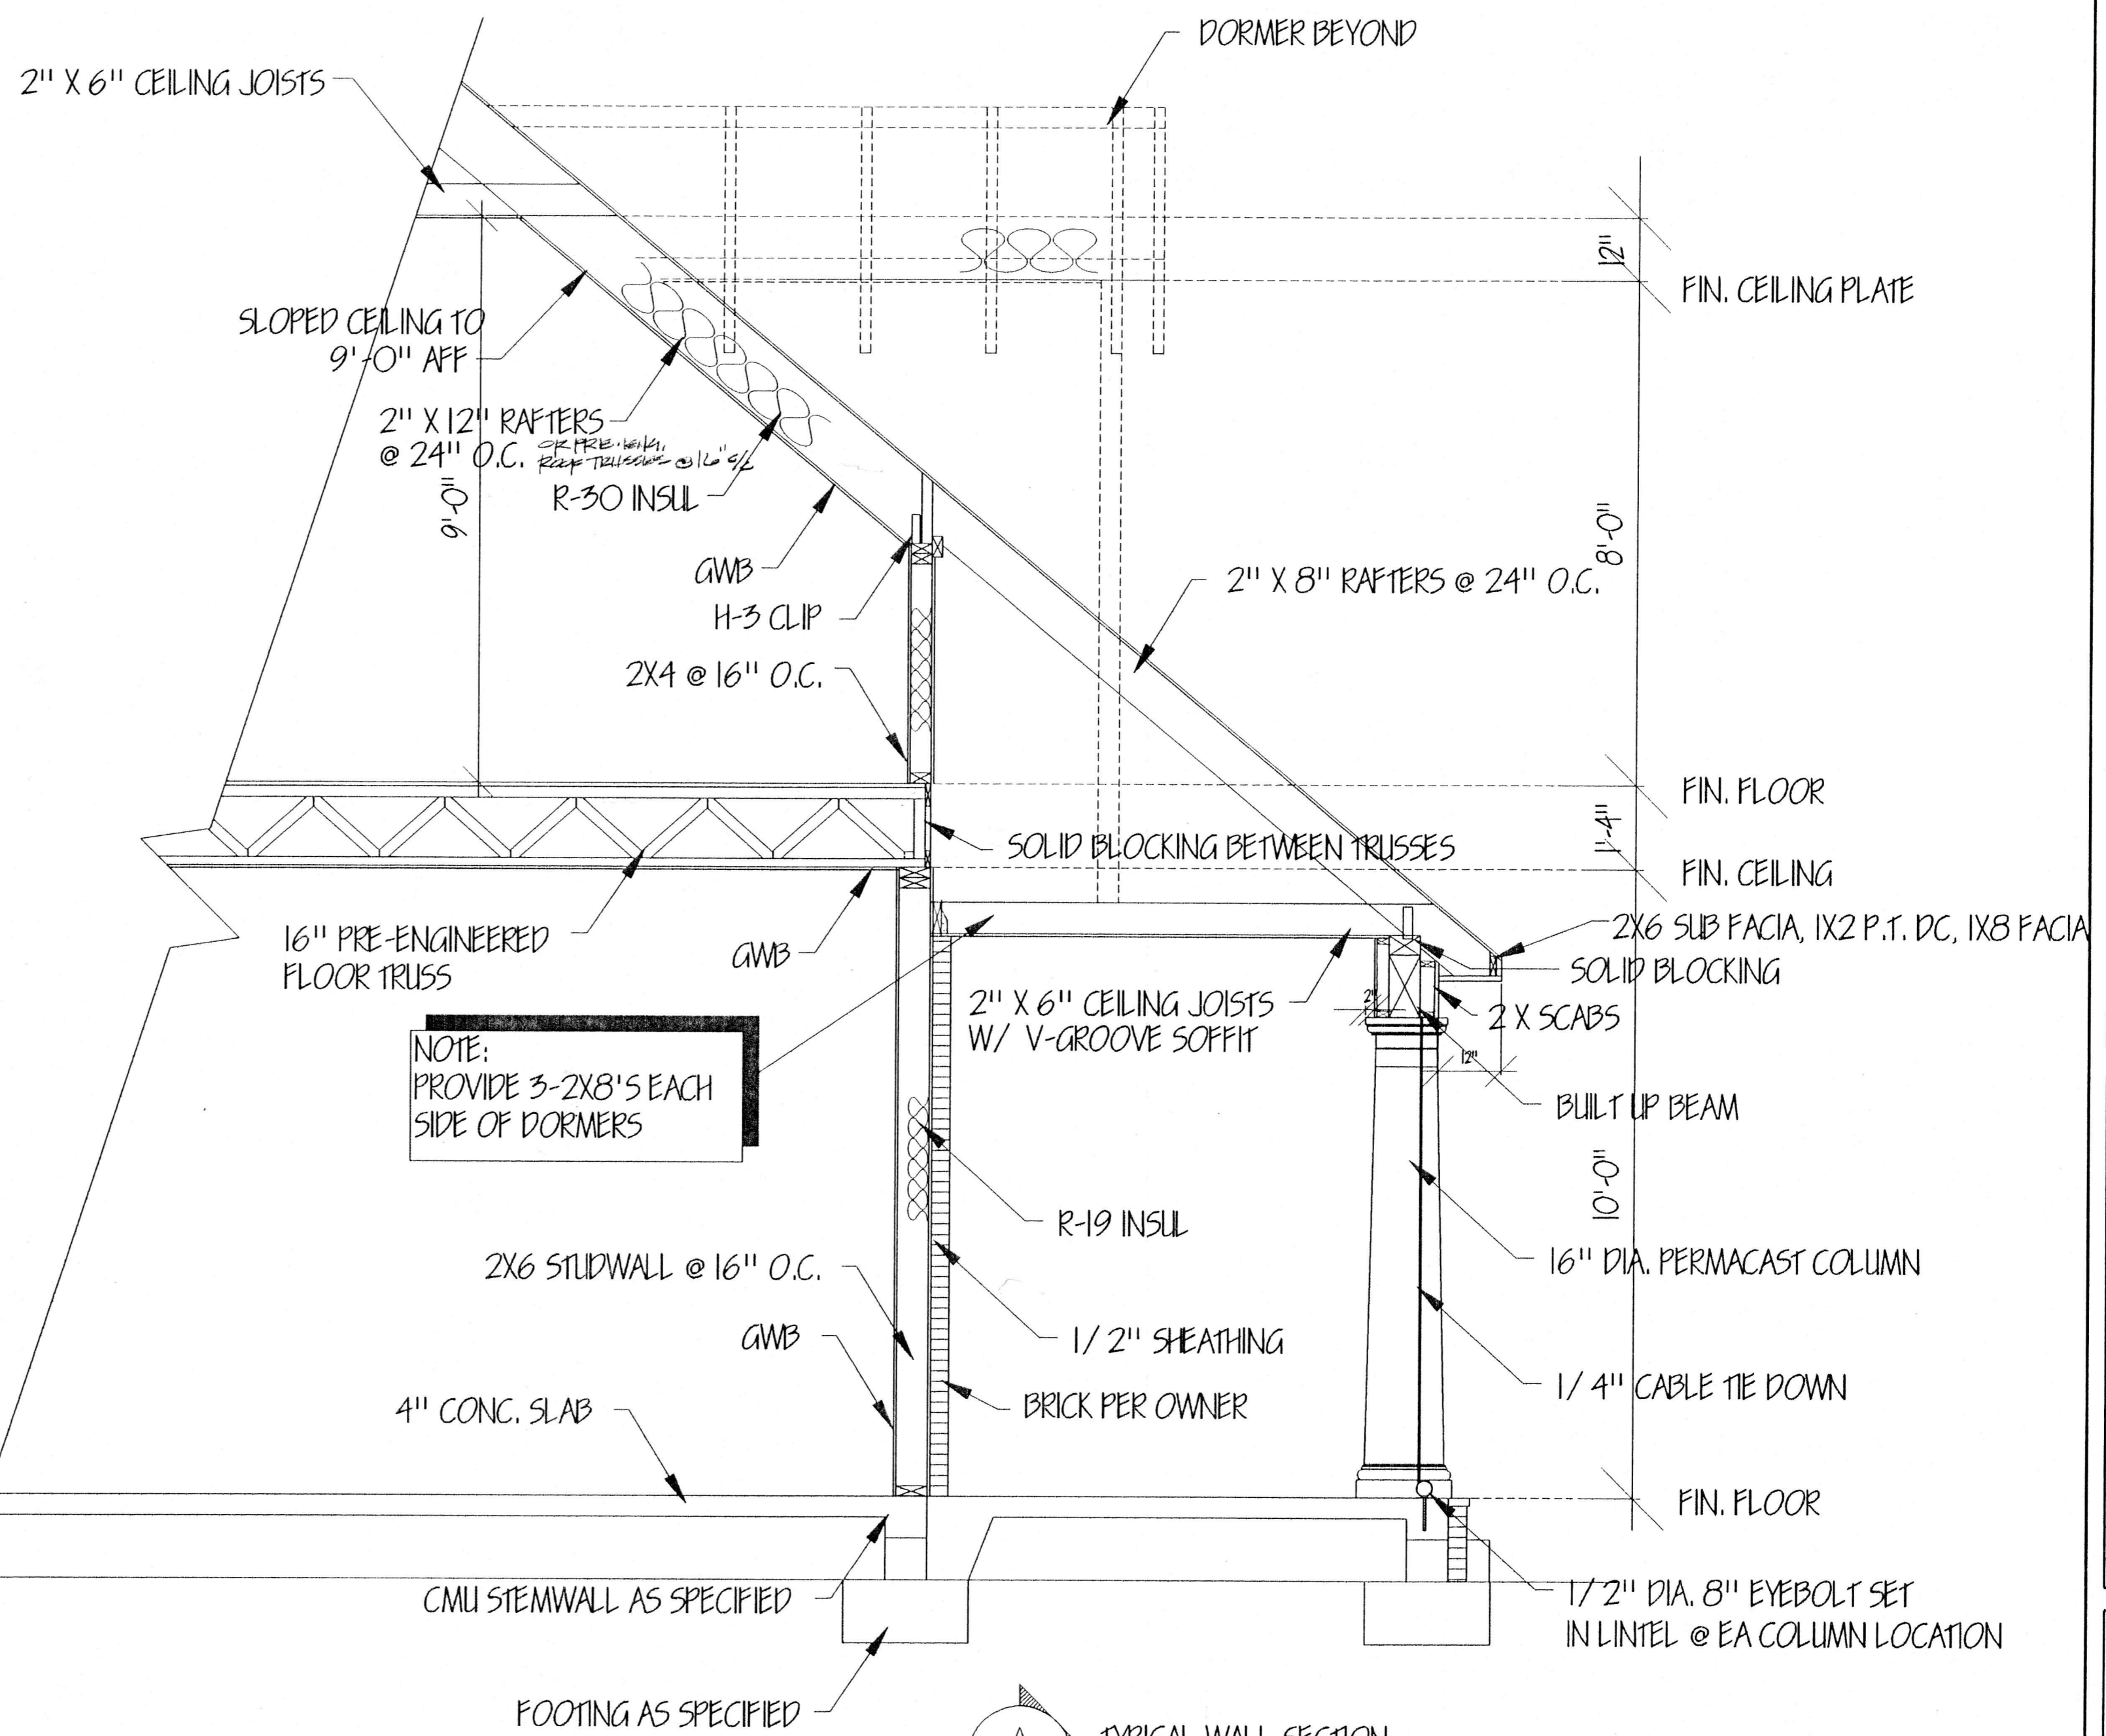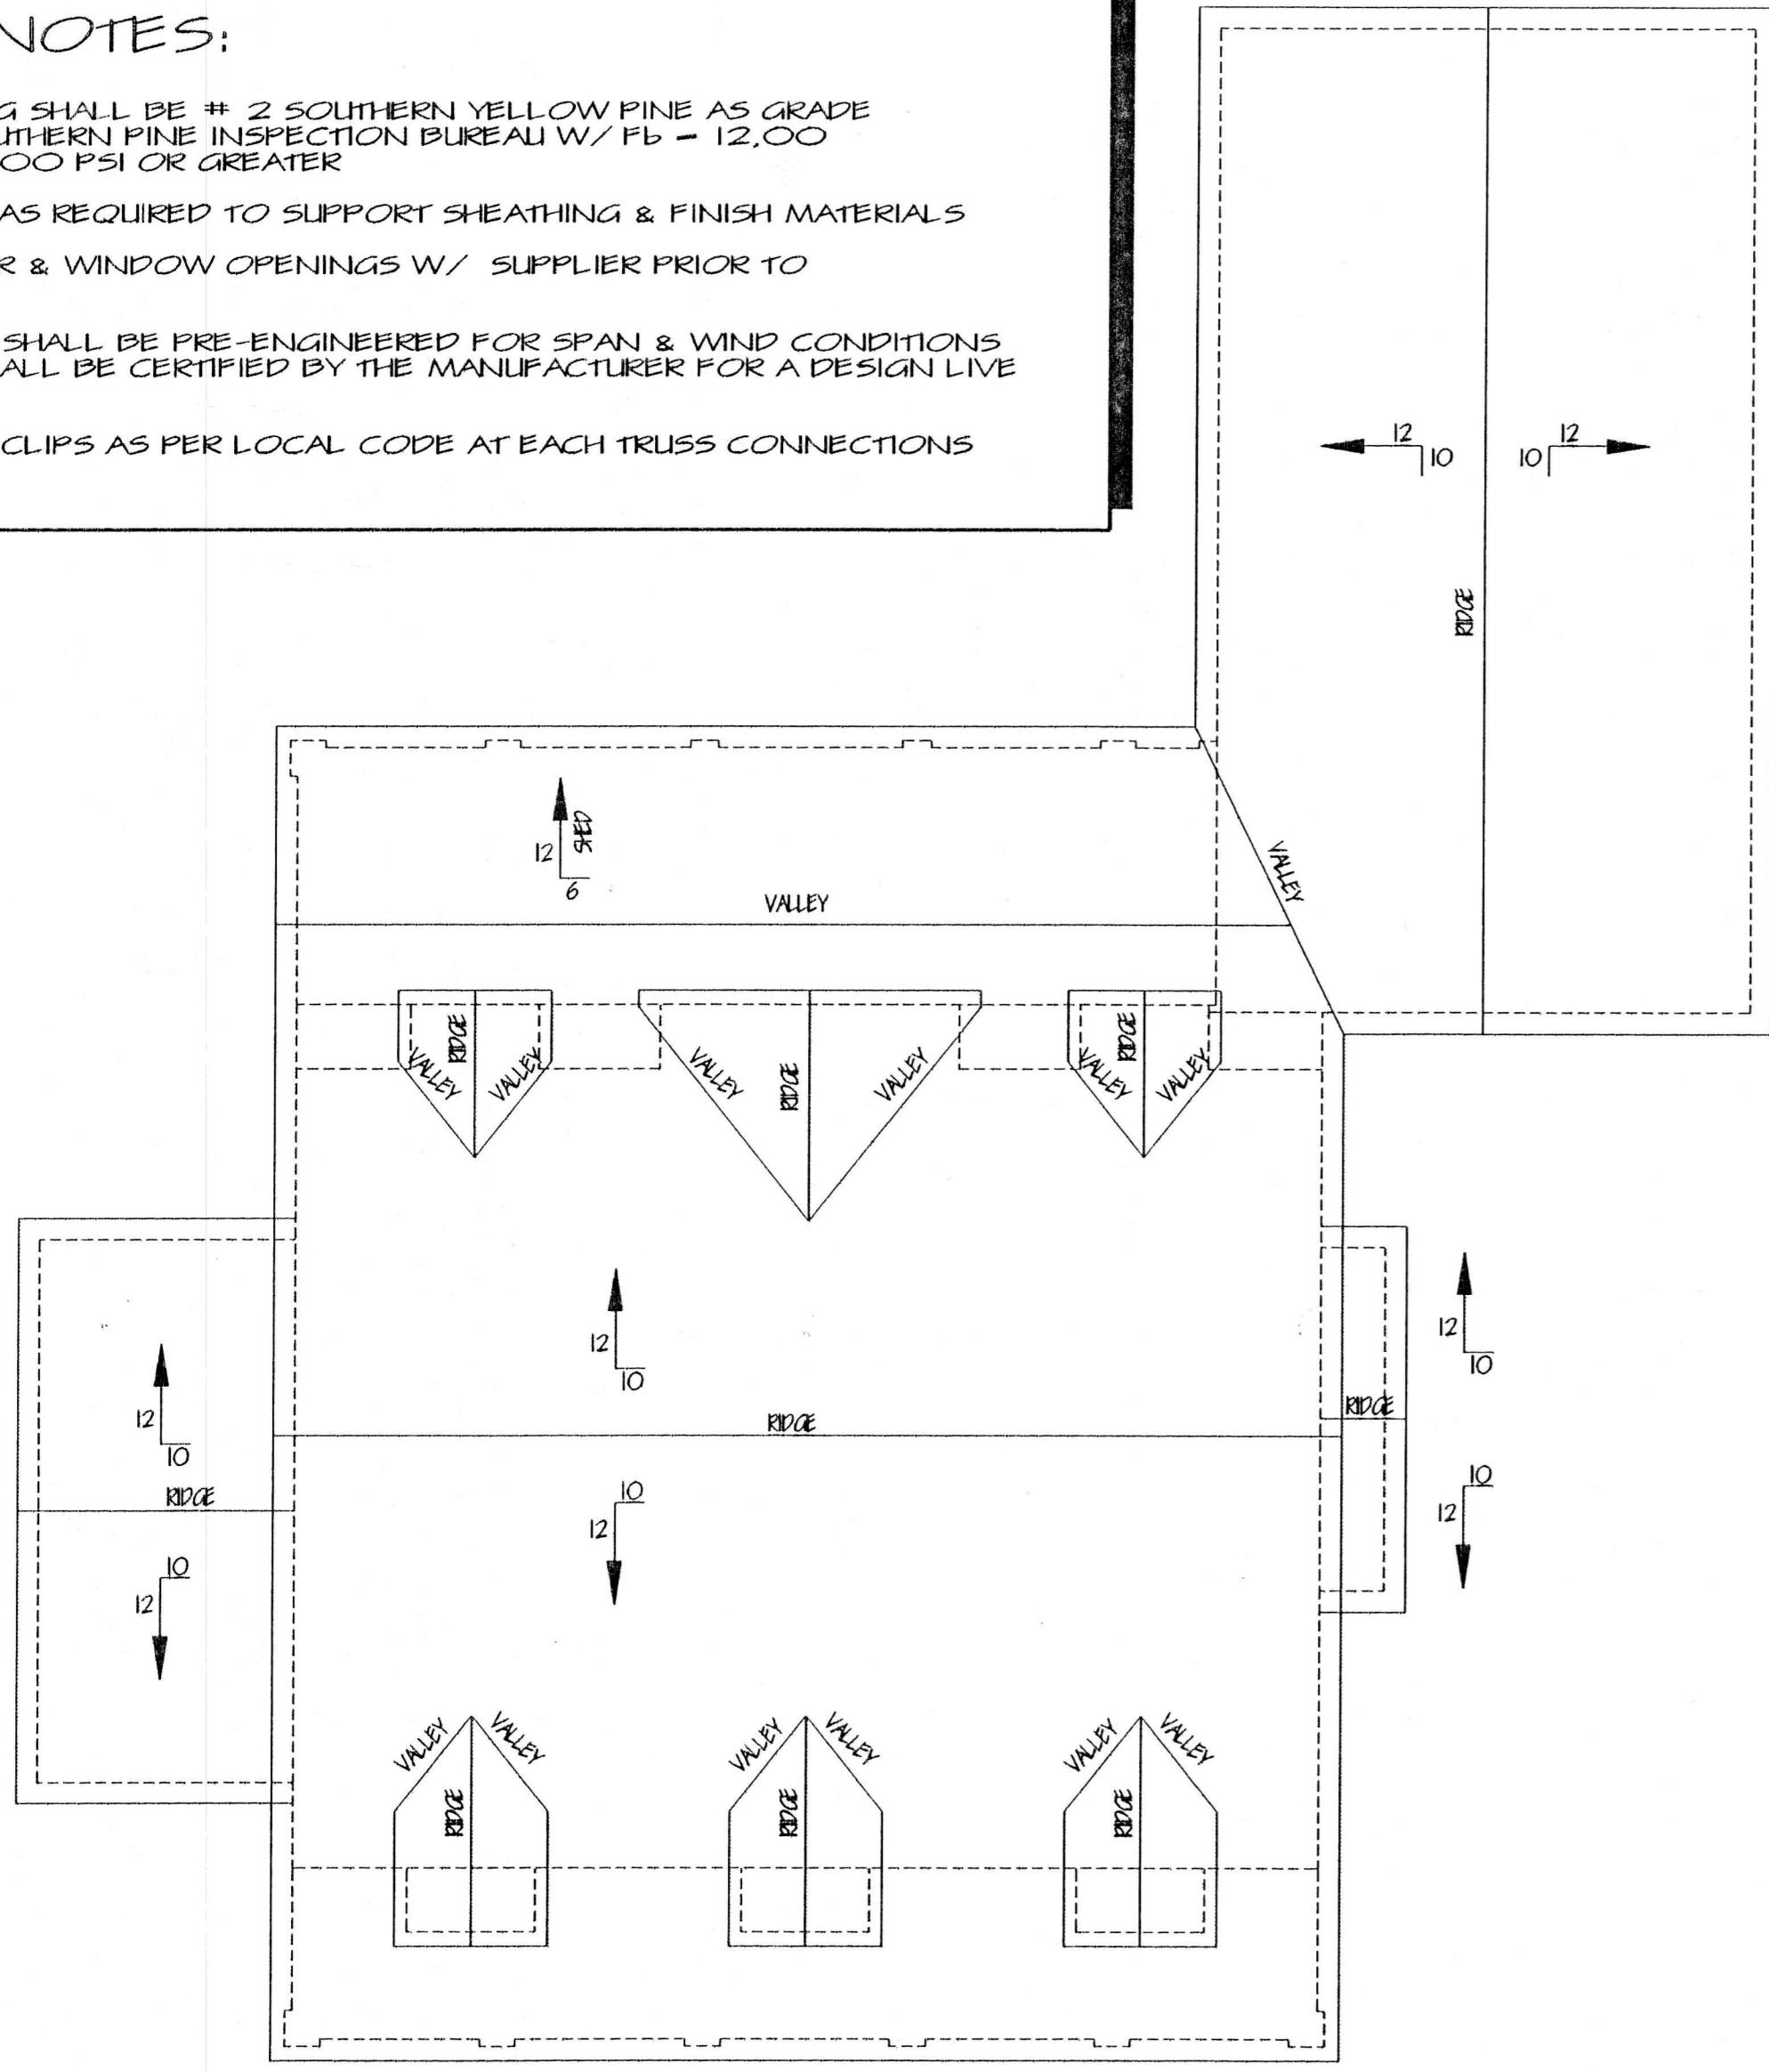

Riley Palmer
Construction Company, Inc.
RPCC
P.O. BOX 12668
TALLAHASSEE, FLORIDA 32317-2668
(904) 656-6161

TAYLOR RESIDENCE
THOMASVILLE, GEORGIA

ISSUE DATE	
DRAWN BY:	
PROJECT NO:	
REVISIONS:	
DATE	REMARKS

